

# American Prairie—Thin Plank



With all the character and texture of our full thickness barn wood, American Prairie Thin Plank is all planed to a consistent 3/8" thick and is just right for cladding walls, doors, cabinetry or anything you can think of. While most of our customers use nails, some use sticky-tape from their local hardware store to hang this reclaimed barn wood.



# Pioneer Millworks American Prairie—Thin Plank

2/2018

## CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION 06 42 00—Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Drive  
Farmington, NY 14425  
Phone: 800-951-9663

Pioneer Millworks  
2609 SE 6th Avenue  
Portland, OR 97202  
Phone: 503-719-4800

### MATERIALS

- Product Name:** American Prairie Thin Plank
- Species/Description:** Domestic Mixed Hardwoods and/or Softwoods with original patina
- Source:** Agricultural/Industrial deconstruction
- Color:** Tones may range from brown to grey. Unlimited color variation is inherent to the product.
- Grade:** Thin Plank
- Dimensions:**
  - Solid**  
TH—3/8"  
WD—3" to 8" as specified  
LG—12" to 96" random
  - Engineered**  
TH—N.A.  
WD—N.A.  
LG—N.A.
- Milling:** Surfaced 3 Sides (S3S)
- Finish:** Unfinished unless specified otherwise
- Hardness:** 420-1100  
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
- FSC Claim:** (SCS-COC-003998)
  - Solid: Recycled 100%
  - Engineered: N.A.

### ADDITIONAL INFORMATION


- Heartwood:** No restriction  
**Grain:** No restriction  
**Knots:** No limitations on sound knots, surface defects from chipped or open knots may be present.  
**Texture:** This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.  
**Voids:** Nail, bolt and other mechanical holes can be present and occasionally reach 2" in diameter. Surface defects from insect marks, including pin holes may be present.  
**Discoloration:** Ferrous staining from previous fasteners may be present.  
**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
**Moisture Content:** Kiln dried 6–9% prior to milling.

### LEED INFORMATION

- MRc3: Materials Reuse  
(materials used for this credit cannot be applied to MRc4 or MRc5)  
MRc4: Recycled Content, 100% Post-Consumer Recycled Content  
(materials used for this credit cannot be applied to MRc3 or MRc7)  
MRc5: Regional Materials (call for details)  
MRc7: Solid Materials are FSC Recycled 100%

### RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

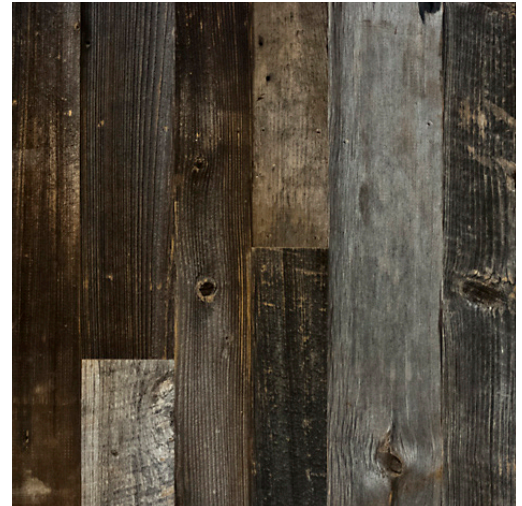

Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.