

# RECLAIMED GREY ELM

## AMERICAN GOTHIC


You're holding a piece of **history** in your hands.

Grey elm did not succumb to Dutch Elm Disease, unlike its sister species red elm, and we encounter both when we salvage old barns. Recycled grey elm provides a clean look, with interesting contrast in the grain.

**AVAILABLE IN**  
Eco-friendly Engineered  
Solid


**FINISH**  
Unfinished  
Prefinished with tung oil

### HARDNESS

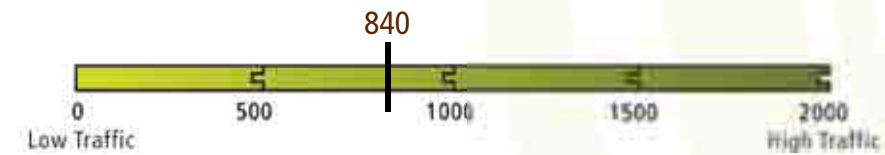

**DIMENSIONS**  
Thickness: 3/4"  
Widths available: 3-10"  
Length: 2-12' Random

### RECOMMENDED INSTALLATION

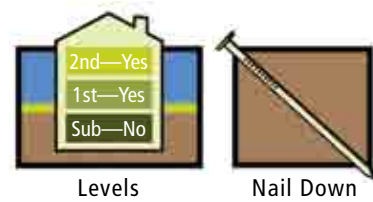

**WARRANTY**  
Floor: Limited warranty, including 25 year structural guarantee.  
Finish: Prefinished products include 20 year wear through guarantee.  
For further details visit: [pioneermillworks.com](http://pioneermillworks.com)

### CARE & MAINTENANCE

- Broom clean
- Spills of any kind should be cleaned immediately
- Consult finish manufacturer for appropriate cleaning instructions





## RECLAIMED AMERICAN HARDWOODS — AMERICAN GOTHIC

Ash, Reclaimed Oak, Red Oak\*\*, White Oak\*\*, Hickory, Beech, Grey Elm, Maple, Chestnut, Red Elm, Cherry, Walnut & Autumn Woods

### DENSITY

No limit on grain density

### HEARTWOOD

No limit on combination of heartwood and sapwood

### GRAIN

A mixture of flat-sawn and vertical grain

### COLOR

No restriction on natural color variation

### KNOTS

No limitation on sound knots. Surface defects resulting from chipped or broken knots will be present.

### TEXTURE

Re-sawing and milling removes all but infrequent saw marks and previous wear patterns.

### HOLES

Nail and other mechanical holes can be present and occasionally reach 3/8" in diameter. Surface defects from insect tracks and pin holes will be present at times in heavy concentrations.

### DISCOLORATION

Ferrous staining from previous fasteners may be present.

### CHECKS

Checks and crack allowed to 3/32" in widths less than 7". In widths 7" and wider these sizes increase.

### LENGTHS

2' – 12' is standard, 5' – 7' average

\* Grading applies to flooring and boardstock, all material graded best face.