

RECLAIMED OAK

AMERICAN GOTHIC


You're holding a piece of **history** in your hands.

Our American Gothic Reclaimed Oak is cut from timbers salvaged from barns and buildings throughout the Northeast. Typically a mix of red and white, the character from exposed insects marks, nail holes, minor cracks, and patina variations makes this a floor that can fit into many styles from rustic to modern.

AVAILABLE IN
Eco-friendly Engineered
Solid


FINISH
Unfinished
Prefinished with tung oil

HARDNESS

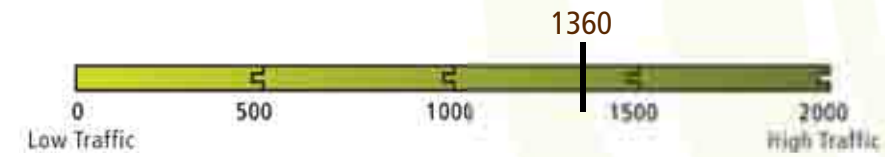

DIMENSIONS
Thickness: 3/4"
Widths available: 3-10"
Length: 2-12' Random

RECOMMENDED INSTALLATION

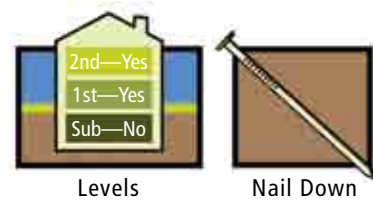

WARRANTY
Floor: Limited warranty, including 25 year structural guarantee.
Finish: Prefinished products include 20 year wear through guarantee.
For further details visit: pioneermillworks.com

CARE & MAINTENANCE

- Broom clean
- Spills of any kind should be cleaned immediately
- Consult finish manufacturer for appropriate cleaning instructions



The FSC logo identifies products from well-managed forests. © 1996 Forest Stewardship Council A.C.



RECLAIMED AMERICAN HARDWOODS — AMERICAN GOTHIC

Ash, Reclaimed Oak, Red Oak**, White Oak**, Hickory, Beech, Grey Elm, Maple, Chestnut, Red Elm, Cherry, Walnut & Autumn Woods

DENSITY

No limit on grain density

HEARTWOOD

No limit on combination of heartwood and sapwood

GRAIN

A mixture of flat-sawn and vertical grain

COLOR

No restriction on natural color variation

KNOTS

No limitation on sound knots. Surface defects resulting from chipped or broken knots will be present.

TEXTURE

Re-sawing and milling removes all but infrequent saw marks and previous wear patterns.

HOLES

Nail and other mechanical holes can be present and occasionally reach 3/8" in diameter. Surface defects from insect tracks and pin holes will be present at times in heavy concentrations.

DISCOLORATION

Ferrous staining from previous fasteners may be present.

CHECKS

Checks and crack allowed to 3/32" in widths less than 7". In widths 7" and wider these sizes increase.

LENGTHS

2' – 12' is standard, 5' – 7' average

* Grading applies to flooring and boardstock, all material graded best face.