

RECLAIMED SOFTWOODS

GRANDMA'S ATTIC

A very old, casual wide board look that is the result of careful selection and partial planing. The patina is maintained, at least in part, through the careful milling process. Tongue-and-groove joints allow for easy installation. We've had good luck rubbing oil into the installed surface using a horse-hair brush and elbow grease.

Generally we work with hemlock, eastern white pine and Douglas fir in this mosaic, however other softwoods are used as available.

AVAILABLE IN

Solid

FINISH

Unfinished
Suggest on site finishing with tung oil or water-based polyurethane.


HARDNESS



DIMENSIONS

Thickness: 3/4"
Widths available: 3-10"
Length: 2-12' Random

RECOMMENDED INSTALLATION

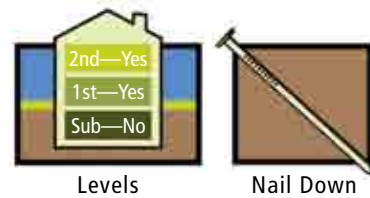


WARRANTY

Floor: Limited warranty, including 25 year structural guarantee.

CARE & MAINTENANCE

- Broom clean
- Spills of any kind should be cleaned immediately
- Consult finish manufacturer for appropriate cleaning instructions

You're holding a piece of **history** in your hands.

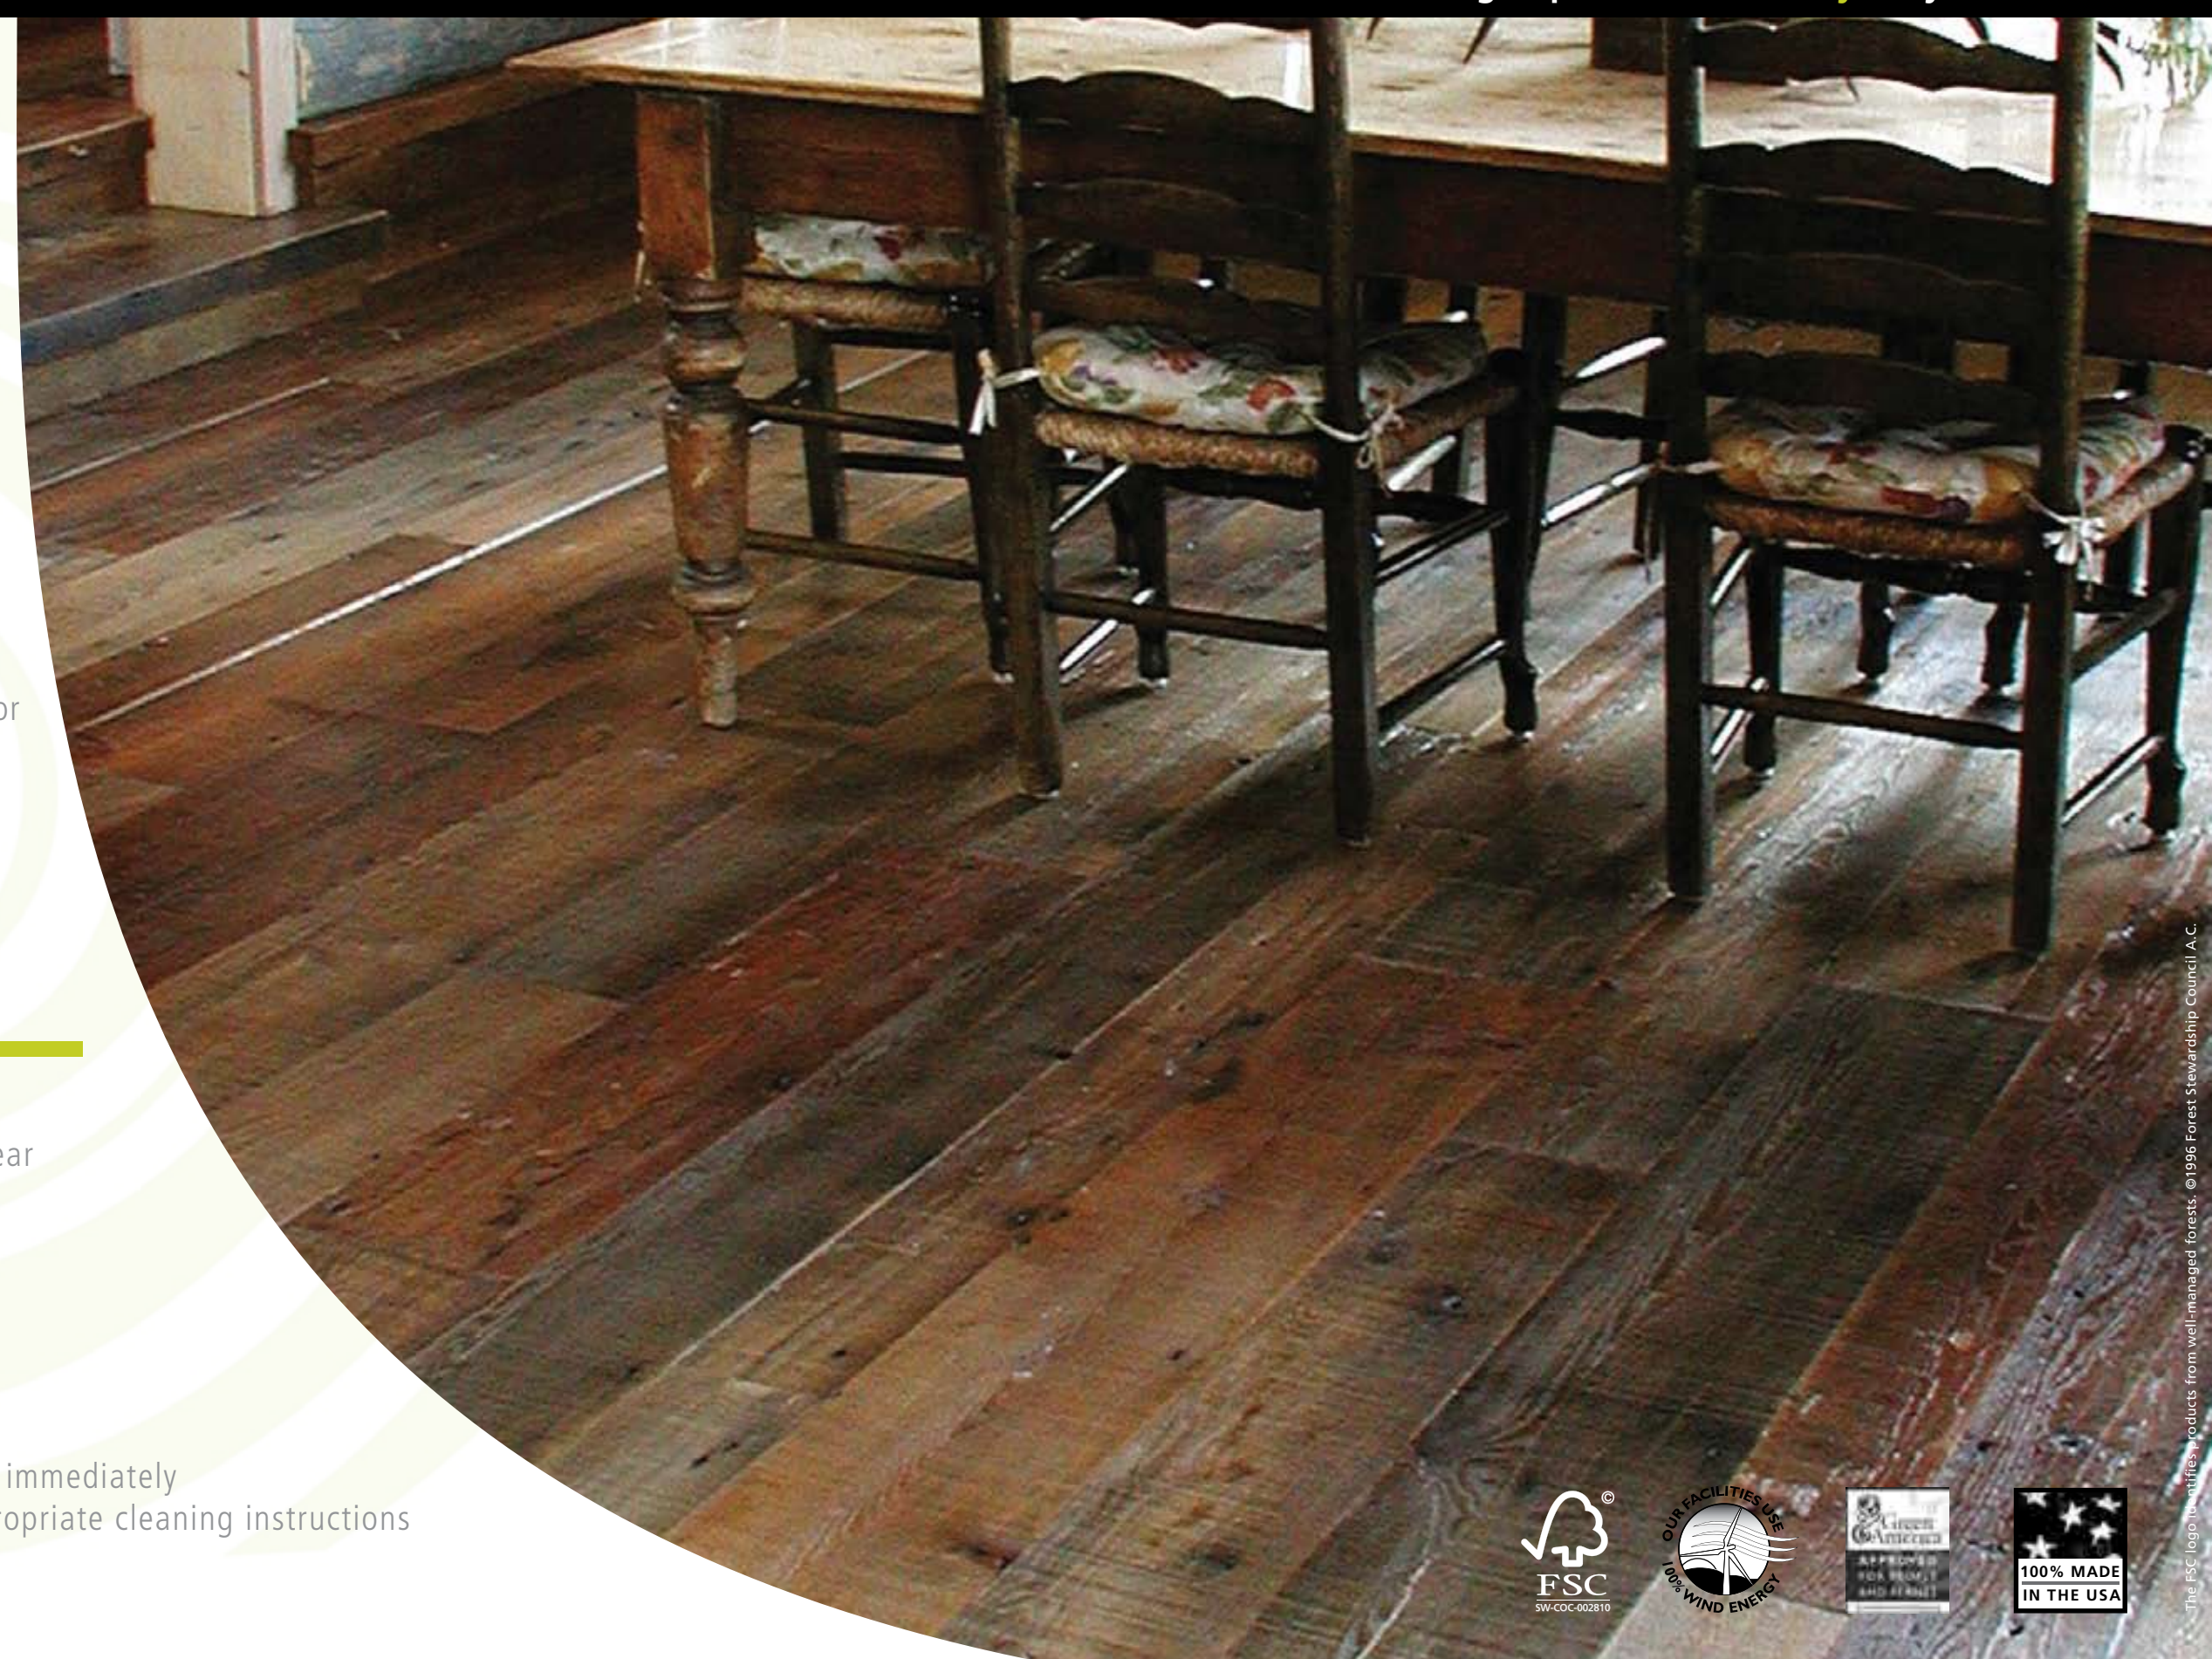

The FSC logo identifies products from well-managed forests. ©1996 Forest Stewardship Council / A.C.



RECLAIMED SOFTWOODS — GRANDMA'S ATTIC

A combination of any softwoods

DENSITY

No limitation on grain density

HEARTWOOD

Unlimited combination of heartwood and sapwood

GRAIN

Unlimited mixture of grain patterns

COLOR

The as-found surfaces range from brown to gray and almost black, sometimes including hints of old paint. We test for and reject lead

KNOTS

Unlimited sound, tight knots permitted, some surface defect from chipped/open knots

TEXTURE

As Found Surface: If surface is left as-found a mixture of original planed and sawn patterns will be seen
Shadow Planed Surface: Shadow planed floors will have above variation with a random pattern of newly planed wood visible

HOLES

Nail and bolt holes may be present and can occasionally reach 1" diameter

DISCOLORATION

Ferrous staining may be present

CHECKS

Checks allowed as long as the board will hold together for installation. No discernible shake. Sound pith allowed.

LENGTHS

2'–12' is standard, 5'–7' average

* Grading applies to flooring and boardstock, all material graded best face.

1180 Commercial Drive | Farmington, NY 14425 | Tel: 800.951.9663 | Fax: 585.924.9962 pionermillworks.com