

RECLAIMED OAK

SETTLERS' PLANK

You're holding a piece of **history** in your hands.


This is a practical recreation of the classic barn floor. Its relaxed, warm appearance puts people at ease. It is made from hardwood that celebrates wear marks, knots, saw marks, nail holes and the wood's naturally occurring vagaries. This is the floor that will give you that rugged look.

Generally available in Oak, Chestnut, and Autumn Woods (mixed hardwoods).

AVAILABLE IN
Solid


FINISH
Unfinished
Suggest on site finishing with tung oil or water-based polyurethane.

HARDNESS

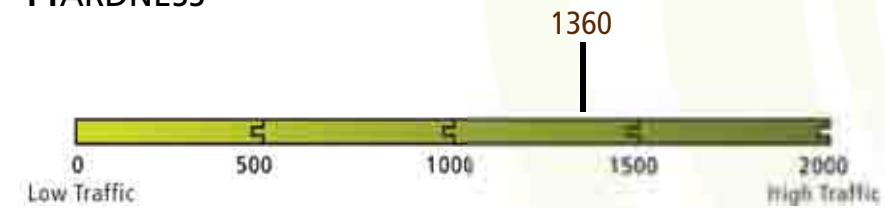

DIMENSIONS
Thickness: 3/4"
Widths available: 3-10"
Length: 2-12' Random

RECOMMENDED INSTALLATION

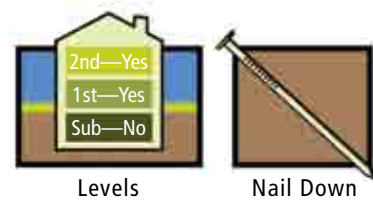

WARRANTY
Floor: Limited warranty, including 25 year structural guarantee.

CARE & MAINTENANCE

- Broom clean
- Spills of any kind should be cleaned immediately
- Consult finish manufacturer for appropriate cleaning instructions



*Please note: This floor has a stain applied.
The FSC logo identifies products from well-managed forests. © 1996 Forest Stewardship Council A.C.



RECLAIMED AMERICAN HARDWOODS — SETTLERS' PLANK

Reclaimed Oak, Chestnut and Autumn Woods

DENSITY

No limit on grain density

HEARTWOOD

No limit on combination of heartwood and sapwood

GRAIN

A mixture of flat sawn and vertical grain

COLOR

A wide range of colors and patinas included, testifying to the mix of history and previous use of the wood

KNOTS

No limitations on sound knots. Surface defects from unsound knots may be present.

TEXTURE

Settlers' Plank is reclaimed from a combination of antique boards, siding and boards re-sawn from barn timbers. This mixture shows a varied pattern of saw marks, wear patterns and textures. Up to 20% of boards may be a planed surface American Gothic.

HOLES

Nail, bolt, and other mechanical holes can be present and occasionally reach 1" in diameter. Surface defects from insect marks, including pin holes may be present.

DISCOLORATION

Ferrous staining from previous fasteners may be present

CHECKS

Structural checks allowed, and more prevalent as the width of the material increases

LENGTHS

2' – 12' is standard, 5' – 7' average

* Grading applies to flooring and boardstock, all material graded best face.

1180 Commercial Drive | Farmington, NY 14425 | Tel: 800.951.9663 | Fax: 585.924.9962 pionermillworks.com