

Gym Flooring—Original



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Salvaged from educational institutions and athletic facilities around the country, our original reclaimed Gym Flooring creates a playful look as the original court lines are reshuffled into a confetti of colorful stripes. Each batch features a different range of colors, along with warm yellows and golds from the clear Maple and the original heavy-duty finish.



Pioneer Millworks

Gym Flooring—Original

2/2018

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood strip and plank flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Original Gym Flooring
2. **Species/Description:** Domestic Maple, original patina
3. **Source:** Flooring reclaimed from athletic facilities
4. **Color:** Tones may range from amber to tan with original paint marks
Unlimited color variation is inherent to the product
5. **Grade:** Original Gym Flooring
6. **Dimensions:**
 - Solid**
TH—3/4" or 1" per batch
WD—3" nominal
LG—12" to 144" random
 - Engineered**
TH—N.A.
WD—N.A.
LG—N.A.
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1300
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
 - Solid: Recycled 100%
 - Engineered: N.A.

ADDITIONAL INFORMATION


Heartwood: No restriction
Grain: No restriction
Knots: Infrequent sound knots may be present
Texture: Areas of peeling or flaking finish may be present
Overwood should be expected after installation
Voids: Boards should be free of all voids. Expect gapping between boards after installation.
Discoloration: Original finish and paint marks will be intact
Checks: No checking permitted
Moisture Content: Kiln dried 6–9% prior to milling

LEED INFORMATION

MRc3: Materials Reuse
(materials used for this credit cannot be applied to MRc4 or MRc5)
MRc4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRc3 or MRc7)
MRc5: Regional Materials (call for details)
MRc7: Solid Materials are FSC Recycled 100%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

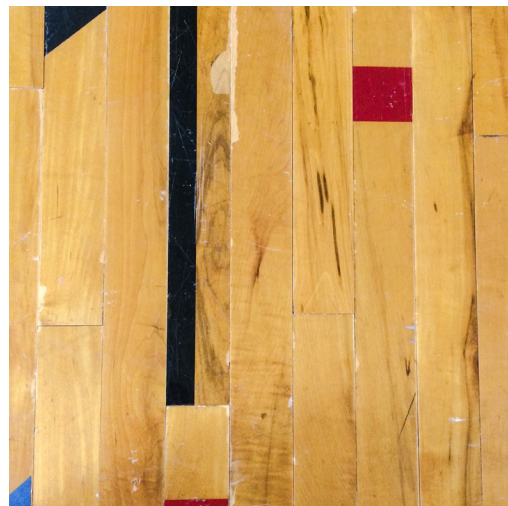

Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.