

# Mixed Hardwoods—American Gothic



**Pioneer Millworks**  
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



This mosaic of Hardwood species native to the Northeastern US may include Ash, Elm, Hickory, Beech, Oak, Maple, and occasionally Cherry—meaning a multitude of color tones and grain patterns are on full display. The colors can range from deep chocolate, to light tan, and insect marks leave no question as to the wood's reclaimed history.



# Pioneer Millworks Mixed Hardwoods—American Gothic

12/2018

## CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring  
06 42 00—Wood Paneling

## MANUFACTURER

Pioneer Millworks  
1180 Commercial Drive  
Farmington, NY 14425  
Phone: 800-951-9663

Pioneer Millworks  
2609 SE 6th Avenue  
Portland, OR 97202  
Phone: 503-719-4800

## MATERIALS

1. **Product Name:** American Gothic Mixed Hardwoods
2. **Species/Description:** Domestic Hardwoods, smooth planed
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range widely from cream to pink to dark brown. Unlimited color variation is inherent to the product.
5. **Grade:** American Gothic
6. **Dimensions:**
  - Solid**  
TH—3/4"  
WD—3" to 10" as specified  
LG—18" to 144" random
  - Engineered**  
TH—5/8"  
WD—4" to 8" as specified  
LG—12" to 96" random
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 770–1450  
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
  - Solid:** FSC Recycled 100%
  - Engineered:** FSC Mix

## ADDITIONAL INFORMATION

**Heartwood:** No restriction

**Grain:** No restriction

**Knots:** No limitations on sound knots, surface defects from chipped or open knots may be present.

**Texture:** Surface should generally be 95% clear of saw marks or patina.

**Voids:** Fastener holes and open knots can be present and may reach 1/2" in diameter in engineered and solid flooring or 1" diameter in solid paneling. Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.

**Discoloration:** Ferrous staining from previous fasteners may be present

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

## LEED INFORMATION

**MRC3:** Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

**MRC4:** Recycled Content, 100% Post-Consumer Recycled Content


(materials used for this credit cannot be applied to MRC3 or MRC7)

**MRC5:** Regional Materials (call for details)

**MRC7:** Solid Materials are FSC Recycled 100%; Engineered FSC Mix

## RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

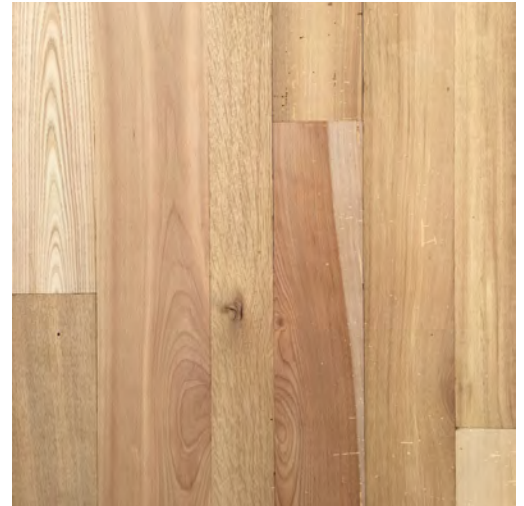

The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.