

Indonesian Teak—Bright




Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



We've searched the globe to bring you environmentally friendly and ethically sourced teak. This extremely versatile species is reclaimed from non-Malaysian sources and is socially responsible—additionally, 1% of our teak sales are donated to the Borneo Project.

Our Bright grade has been carefully planed to a smooth surface that accentuates the swirling tans and toffee browns of the wood. Tight grain makes Teak strong and durable, able to withstand the wear and tear of shoes, animals, and weather. Natural oils make it resistant to rot, insects, and fungi. Thanks to its water resistant nature, consider including the warm tones and texture of Teak in place of tile in places like kitchens and baths. Add a color finish to customize your hue, use it indoors or outdoors, on vertical or horizontal surfaces—the versatility of teak makes it a valuable arsenal in any design tool-kit.

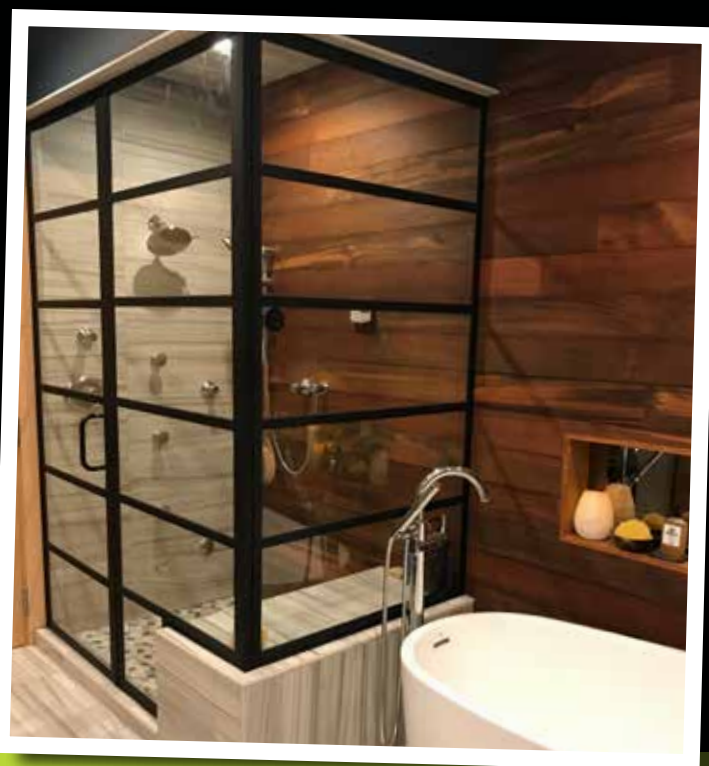

Pioneer Millworks Indonesian Teak—Bright

12/2018

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Indonesian Teak Bright
2. **Species/Description:** Indonesian Teak, smooth planed
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from golden tan to toffee brown. Unlimited color variation is inherent to the product.
5. **Grade:** Bright
6. **Dimensions:**
 - Solid**
TH— 3/4"
WD— 4 1/8" to 5 1/4" as specified
LG— 24" to 84" random
 - Engineered**
TH—9/16" in narrow, 3/4" in wide
WD—3 1/2" to 8" as specified
LG—24" to 84" random
7. **Milling:** Tongue and Groove Micro Bevel Edge (TGMBVE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1070
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim: (SCS-COC-003998)**
 - Solid:** FSC Recycled 100%
 - Engineered:** FSC Recycled 100%

ADDITIONAL INFORMATION

Heartwood: No restriction.

Grain: No restriction.

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with plugs.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.

Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRc3: Materials Reuse (materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content (materials used for this credit cannot be applied to MRc3 or MRc7)

MRc7: Solid Materials are FSC Recycled 100%; Engineered FSC Recycled 100%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.