


Painted & Sanded—Foundry Maple



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Salvaged from factories and steeped in history, this hardy Maple was underfoot for a century of textile weaving, furniture building, horseless carriage manufacturing, toy making, and more. This grade is hand-painted then sanded to reveal the creamy and warm tones of the wood leaving a little splash of color in the deep worn textures of the planks.

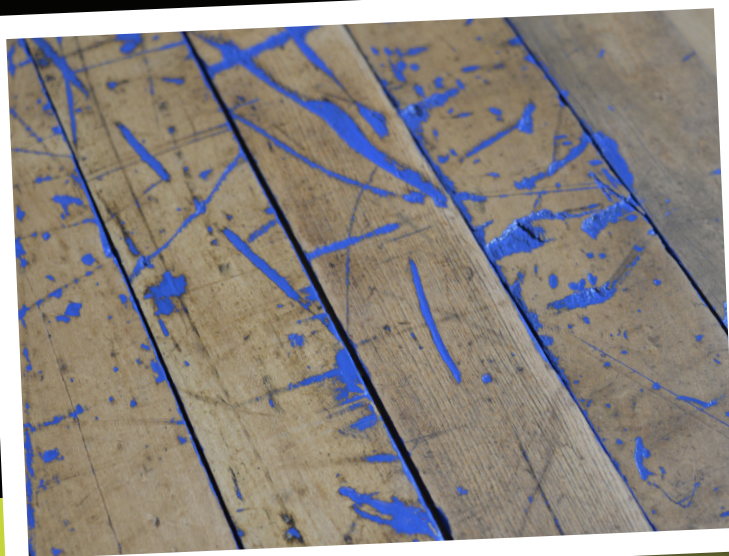

Pioneer Millworks

Painted & Sanded—Foundry Maple

1/2020

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Painted & Sanded Foundry Maple
2. **Species/Description:** Domestic Maple, original patina, painted & sanded.
3. **Source:** Flooring reclaimed from industrial facilities.
4. **Color:** Wood tones may range from cream to tan.
Paint color as specified.
Unlimited color variation is inherent to the product.
5. **Grade:** Painted & Sanded Foundry
6. **Dimensions:**
Solid
TH—3/4" or 1" per batch
WD—3" nominal
LG—12" to 144" random
Engineered
TH—N.A.
WD—N.A.
LG—N.A.
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
or Square Edge (SQE) per batch
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1300
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
Solid: FSC Recycled 100%
Engineered: N.A.

ADDITIONAL INFORMATION

Heartwood: No restriction

Grain: No restriction

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: Texture variation from original wear and environmental conditions.
Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter flooring or 1" diameter paneling. Larger voids are occasionally included to preserve long lengths.

Discoloration: Applied paint will remain in surface crevices.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.

Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

MRc7: Solid Materials are FSC Recycled 100%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



Shown in Gentleman's Grey—
many color options available.



The mark of
responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.