


# Black & Tan—Tan (Raked™) Oak

Pioneer Millworks  
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Our Raked™ Black & Tan—Tan flaunts even reliefs across the surface of each plank, leaving deep grooves where light and shadow play. The resulting striped pattern can be matched, rotated, or even sporadically sprinkled, throughout a project. Add a pop of color to the top for an even deeper contrast in the raked texture. To aid in stability and versatility, this line is only available as an engineered product. Although we like it best using Black & Tan—Tan, we've raked other species and are always up for trying out something new.

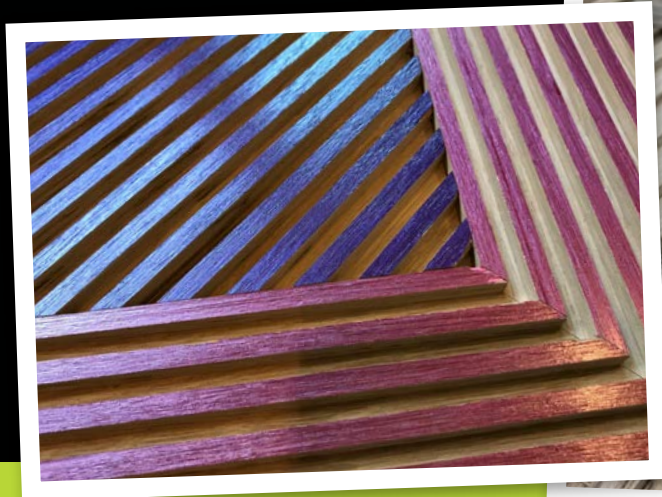

# Pioneer Millworks

## Black & Tan—Tan (Raked™) Oak

3/2020

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring  
06 42 00—Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Drive  
Farmington, NY 14425  
Phone: 800-951-9663

Pioneer Millworks  
2609 SE 6th Avenue  
Portland, OR 97202  
Phone: 503-719-4800

### MATERIALS

1. **Product Name:** Black & Tan—Tan (Raked™) Oak
2. **Species/Description:** Red and White Oak, smooth planed with a grooved surface
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from tan to pink. Unlimited color variation is inherent to the product.
5. **Grade:** Raked
6. **Dimensions:**
  - Solid**  
TH— N.A.  
WD— N.A.  
LG— N.A.
  - Engineered**  
TH— 5/8"  
WD— 5" nominal  
LG— 12" to 96" random
7. **Milling:** Tongue and Groove Square Edge (TGSQE) with a grooved face.
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1290  
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
  - Solid:** N.A.
  - Engineered:** FSC Mix

### ADDITIONAL INFORMATION

**Heartwood:** No restriction.

**Grain:** No restriction.

**Knots:** No limitations on sound knots, surface defects from chipped or open knots may be present.

**Texture:** Surface should be 95% clear of saw marks or patina and milled with raked grooves that are 1/4" wide and 1/8" deep.

**Voids:** Nail, bolt and other mechanical holes can be present and occasionally reach 3/16" in diameter. Surface defects from insect marks, including pin holes may be present.

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Minor surface checking allowed.

**Moisture Content:** Kiln dried 6–9% prior to milling.

### LEED INFORMATION

**MRC3:** Materials Reuse (materials used for this credit cannot be applied to MRC4 or MRC5)

**MRC4:** Recycled Content, 100% Post-Consumer Recycled Content (materials used for this credit cannot be applied to MRC3 or MRC7)

**MRC5:** Regional Materials (call for details)

**MRC7:** Engineered Materials are FSC Mix

### RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.