




Pioneer Millworks Douglas fir Siding and Shiplap is an FSC® chain-of-custody certified, and a Pacific Northwest harvested option for wood in vertical applications. The rot resistance of Douglas fir and small tight knots, make it a favorite material choice for exterior applications. Our Douglas fir's signature vertical grain has been brushed once allowing our standard color finishes to shine. Also available pre-primed for easy application of paint colors or unfinished to be stained on site.


Whites



Cloud

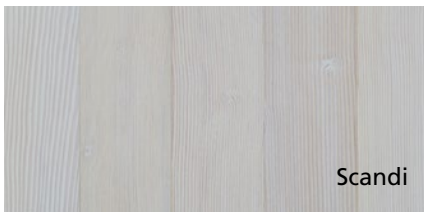


Scandi

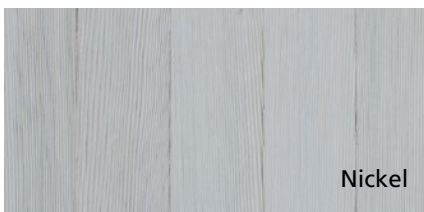


Nickel

Cool Tones

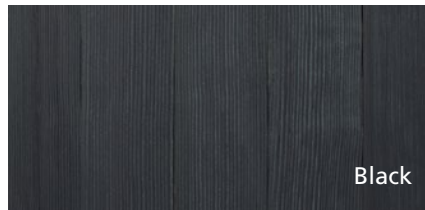

Black

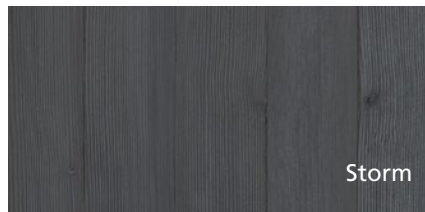

Storm

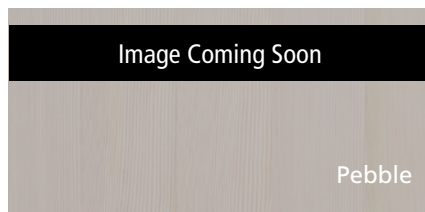



Image Coming Soon

Pebble


Warm Browns



Sand

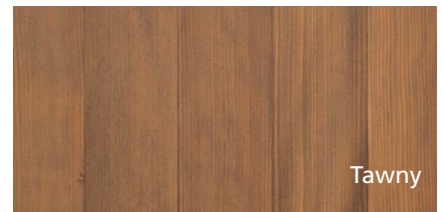


Tawny

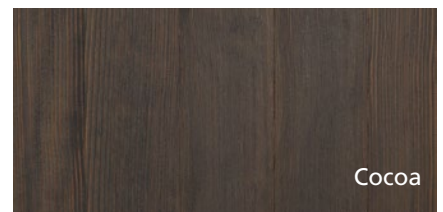


Cocoa

Warm Greys

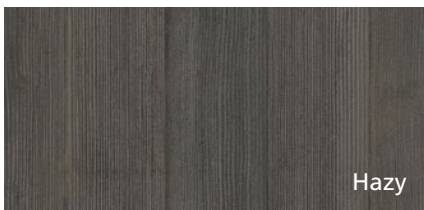


Hazy

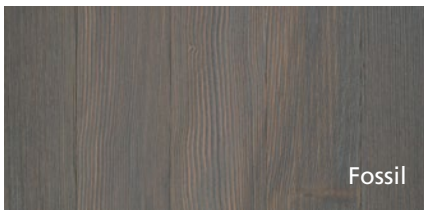


Fossil

Color

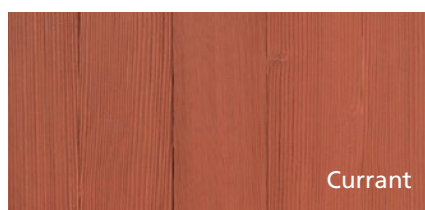


Currant

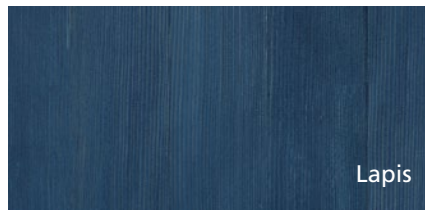


Lapis

Basics

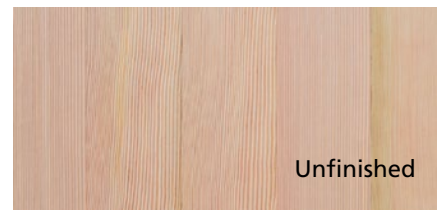

Unfinished

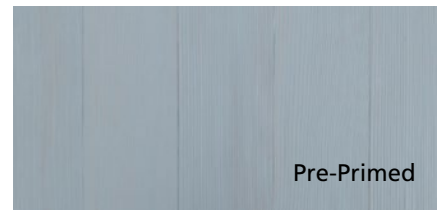

Pre-Primed

Pioneer Millworks

Douglas fir Siding & Shiplap

6/2021

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00—Wood Paneling
07 46 23—Wood Siding

MANUFACTURER

Pioneer Millworks
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks
2609 SE 6th Avenue
Portland, OR 97202
Phone: 503-719-4800

MATERIALS

1. **Product Name:** Douglas fir Siding & Shiplap
2. **Species/Description:** Douglas fir (*Pseudotsuga menziesii*). Brushed for a textured surface with superior finish adhesion and color longevity.
3. **Source:** Sustainably Harvested Forests.
4. **Color:** Available prefinished or unfinished, standard and custom colors available. Unfinished wood tone ranges from pinkish white to light brown; color variation is inherent to the product.
5. **Grade:** Sound Tight Knots (STK).
6. **Dimensions:**
 - Solid—Shiplap**
 - TH—3/4"
 - WD—5" face
 - LG—8' to 16' random, called lengths available.
7. **Milling:** Shiplap no reveal, shiplap "nickel-gap", square-edge (S3S), or Tongue & Groove (TGSQE).
8. **Finish:** Unfinished or prefinished with a non-toxic, water-based poly as specified (2 coats face, one coat back).
9. **Hardness:** 620
(Janka Ball Test ASTM D1037-96A, natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled).
10. **FSC Claim:** FSC Mix.

ADDITIONAL INFORMATION

Heartwood: No restriction.

Grain: Vertical.

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: Brushed.

Voids: Occasional blown out knots up to 1" diameter may be present.

Checks: Checks allowed so long as material integrity is not adversely affected.

Moisture Content: Kiln dried 12–15% prior to milling.

LEED INFORMATION

MRc3: Materials Reuse (materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: N/A

MRc5: Regional Materials (call for details).

MRc7: N/A

RECOMMENDED OVERAGE

Recommend 10-15% additional material for on-site grading, trimming and installation factors.



Shown Unfinished



Information is deemed reliable but subject to change.
All photos for representation only. Additional information available at our website or call our wood design experts.