

Settlers' Plank—Oak



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Red and White Oak were prolific throughout most of the Eastern US and used in construction across agriculture and industry. We carefully skip plane our Settlers' Plank material so that at least 50% of the overall surface has remnants of original saw marks and patina. Ranging from rough, dark original texture to smooth and bright grain, this grade is durable and rich in character—perfect for accent walls or flooring.



Pioneer Millworks Settlers' Plank—Oak

5/2022

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks East
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks West
2655 NE Orchard Ave.
McMinnville, OR 97128
Phone: 503-437-9017

MATERIALS

1. **Product Name:** Settlers' Plank Oak
2. **Species/Description:** Primarily Domestic Red and White Oak -up to 20% may be other hardwood species
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range from gold to brown to grey. Unlimited color variation is inherent to the product.
5. **Grade:** Settlers' Plank
6. **Dimensions:**
 - Solid**
TH—3/4"
WD—4" to 6" random, wider widths may be available upon request
LG—18" to 12' random
 - Engineered**
TH—5/8"
WD—4" to 6" random, wider widths may be available upon request
LG—12" to 96" random
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 1060–1360
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
 - Solid:** FSC Recycled 100%
 - Engineered:** FSC Mix

ADDITIONAL INFORMATION

Heartwood: No restriction

Grain: No restriction

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures. Material is surfaced so that approximately 50% of the original patina remains. Generally, 70% of boards have some patina. Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in engineered and solid flooring or 1" diameter in solid paneling. Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.

Discoloration: Ferrrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content


(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)

MRC7: Solid Materials are FSC Recycled 100%; Engineered FSC Mix

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.

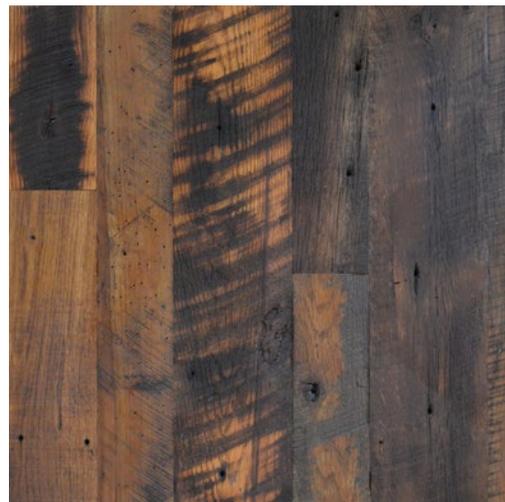

Shown in Pure finish



The mark of responsible forestry



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.