


Premium Select Mixed Grain—Heart Pine



Pioneer millworks
RECLAIMED & SUSTAINABLE WOOD PRODUCTS



Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. The Premium Select Mixed Grain is sorted for dense grain and limited knots and nail holes, while leaving a variety of grain patterns. It's a little more playful than its vertical grain cousin—lending a casual elegance.

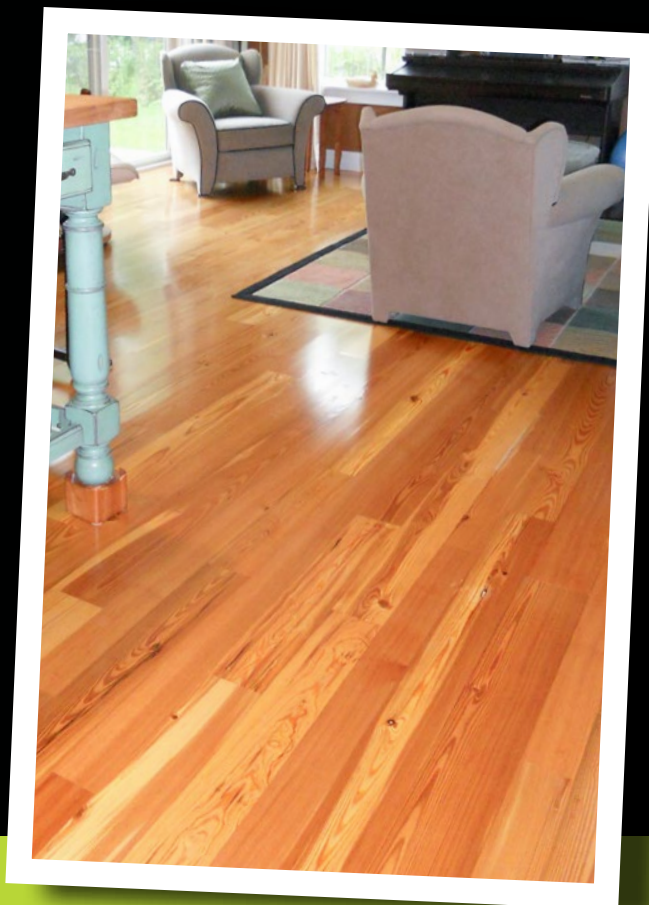

Pioneer Millworks

Premium Select Mixed Grain—Heart Pine

3/2023

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood strip and plank flooring

06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks East
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks West
2655 NE Orchard Ave.
McMinnville, OR 97128
Phone: 503-437-9017

MATERIALS

- Product Name:** Premium Select Mixed Grain Heart Pine
- Species/Description:** Domestic Heart Pine, smooth planed
- Source:** Agricultural/Industrial deconstruction
- Color:** Tones may range widely from yellow to amber.
Unlimited color variation is inherent to the product.
- Grade:** Premium Select Mixed Grain
- Dimensions:**
 - Solid**
TH—3/4"
WD—3" to 6" random
LG—18" to 12' random
 - Engineered**
TH—5/8"
WD—4" to 6" random
LG—12" to 7.5' random
- Milling:** Tongue and Groove Square Edge (TGSQE)
- Finish:** Unfinished unless specified otherwise
- Hardness:** 1200
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
- FSC Claim:** (SCS-COC-003998)
 - Solid:** FSC Recycled 100%
 - Engineered:** FSC Mix

ADDITIONAL INFORMATION

- Heartwood:** 85% or greater heartwood content
Grain: 90% or greater dense grain (8 rings or more per inch)
Knots: Overall appearance should be 90% clear of knots.
An average of one knot per 6 LF is permissible.
Knots should not exceed 3/4" in diameter.
Texture: Surface should be 100% clear of saw marks or patina.
Voids: Occasional nail holes up to 3/16" in diameter may be present
Discoloration: Minimal ferrous staining from previous fasteners may be present.
Checks: No checking permitted.
Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

- MRC3:** Materials Reuse
(materials used for this credit cannot be applied to MRC4 or MRC5)
MRC4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRC3 or MRC7)
MRC5: Regional Materials (call for details)
MRC7: Solid Materials are FSC Recycled 100%; Engineered FSC Mix

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



Information is deemed reliable but subject to change. All photos for representation only. Additional information available at our website or call our wood design experts.