


Center Cut—Vat Stock



Sourced from the food or wine industries, this mix of tightly grained softwoods made the vats that held fruits, pickles, wine, water, or vinegar. This center cut variation is the smooth planed interior of the vat staves. The look of reclaimed vat stock will vary somewhat batch to batch but expect color tones ranging from pink to tan to brown. Typically 10–20% of center cut plants will have dark staining from the original vat's contents.

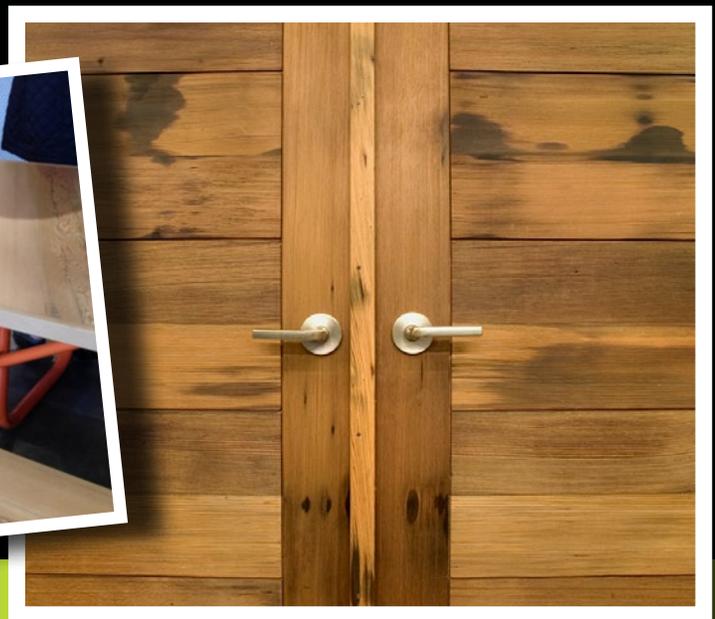

Pioneer Millworks Center Cut—Vat Stock

3/2023

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29—Wood Strip and Plank Flooring
06 42 00—Wood Paneling

MANUFACTURER

Pioneer Millworks East
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks West
2655 NE Orchard Ave.
McMinnville, OR 97128
Phone: 503-437-9017

MATERIALS

1. **Product Name:** Center Cut Vat Stock
2. **Species/Description:** Domestic Mixed Softwoods, smooth planed
3. **Source:** Agricultural/Industrial deconstruction
4. **Color:** Tones may range widely from cream to pink to brown with occasional dark staining. Unlimited color variation is inherent to the product.
5. **Grade:** Center Cut
6. **Dimensions:**
 - Solid**
TH—5/8"
WD—3" to 8" random
LG—18" to 12' random
 - Engineered**
TH—N.A
WD—N.A
LG—N.A.
7. **Milling:** Tongue and Groove Square Edge (TGSQE)
8. **Finish:** Unfinished unless specified otherwise
9. **Hardness:** 660
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)
10. **FSC Claim:** (SCS-COC-003998)
 - Solid:** Recycled 100%
 - Engineered:** N.A.

ADDITIONAL INFORMATION

Heartwood: No restriction
Grain: No restriction; typically dense (8 rings or more per inch).
Knots: Typically clear with few knots.
Texture: Surface should generally be 95% clear of saw marks or patina.
Voids: Very infrequent nail holes.
Discoloration: Pink and black staining from previous vat use may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling.

LEED INFORMATION

MRC3: Materials Reuse
(materials used for this credit cannot be applied to MRC4 or MRC5)
MRC4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRC3 or MRC7)
MRC5: Regional Materials (call for details)
MRC7: Solid Materials are FSC Recycled 100%

RECOMMENDED OVERAGE

Recommend 7–12% additional material for on-site grading, trimming and installation factors.



Information is deemed reliable but subject to change.
All photos for representation only. Additional information available at our website or call our wood design experts.