



Pioneer Millworks Larch Siding and Shiplap is PEFC sourced Larch. The signature swirling grain and small tight knots of larch brings a natural finish to vertical applications. The rot resistance of this underutilized species rivals that of Douglas fir, and it is locally grown in the Pacific Northwest which makes it a great option for exterior or interior uses. Pair it with one of our color options which show off the wood grain patterns through hue and tone; it has been brushed which enhances color saturation & adhesion. Also available pre-primed for easy application of paint colors.



Cloud



Black




Sand



Scandi



Storm

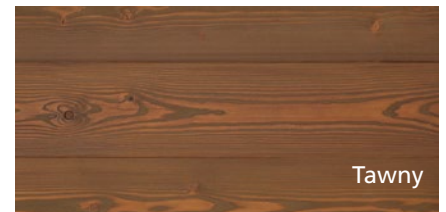


Tawny



Nickel



Pebble

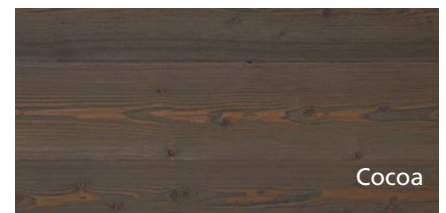

Cocoa



Salt Flats



Currant



Camel




Harbor




Lapis



Hazy

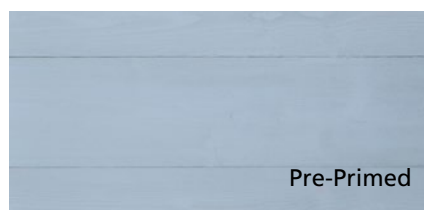

Pre-Primed

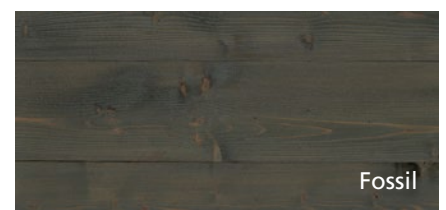

Fossil

Pioneer Millworks Larch Shiplap

7/2023

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 42 00—Wood Paneling
07 46 23—Wood Siding

MANUFACTURER

Pioneer Millworks East
1180 Commercial Drive
Farmington, NY 14425
Phone: 800-951-9663

Pioneer Millworks West
2655 NE Orchard Ave.
McMinnville, OR 97128
Phone: 503-437-9017

MATERIALS

1. **Product Name:** Larch Siding & Shiplap
2. **Species/Description:** Western Larch (*Larix occidentalis*). Brushed for superior finish adhesion and color longevity
3. **Source:** PEFC-Certified Sources
4. **Color:** Available prefinished or unfinished, standard and custom colors available. Unfinished wood tone ranges from cream to light brown; color variation is inherent to the product.
5. **Grade:** Sound Tight Knots (STK).
6. **Dimensions:**
Solid—Shiplap
TH—5/8"
WD—5" face
LG—8' to 16' random, called lengths available.
7. **Milling:** Shiplap no reveal, shiplap "nickel-gap", square-edge (S4S), or TGBVE.
8. **Finish:** Unfinished or prefinished with a exterior sealer as specified (2 coats face, one coat back).
9. **Hardness:** 830
(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled).
10. **FSC Claim:** None.

ADDITIONAL INFORMATION

Heartwood: No restriction.

Grain: No restriction.

Knots: No limitations on sound knots, surface defects from chipped or open knots may be present.

Texture: Brushed.

Voids: Occasional blown out knots up to 1" diameter may be present.

Checks: Checks allowed so long as material integrity is not adversely affected.

Moisture Content: Kiln dried 12–15% prior to milling.

LEED INFORMATION

MRc3: N/A

MRc4: N/A

MRc5: Regional Materials (call for details).

MRc7: N/A

RECOMMENDED OVERAGE

Recommend 10-15% additional material for on-site grading, trimming and installation factors.



Shown Unfinished



Information is deemed reliable but subject to change.
All photos for representation only. Additional information
available at our website or call our wood design experts.