



CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
 06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
 1180 Commercial Dr
 Farmington, NY 14425

MATERIALS

Product: Black & Tan Reclaimed Oak
Collection: Reclaimed
Species: Domestic Oak
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from tan to pink
Unlimited color variation is inherent to the product

Finish: Unfinished

Hardness: 1290

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3 3/4"	Back-Relief:	Included
Length:	12" – 6.5' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots
Surface defects from chipped or open knots may be present
Texture: Surface should generally be 95% clear of saw marks or patina
Voids: Nail holes and open knots can be present and may reach 1/2" in diameter. Larger voids may be included in longer planks.
Insect marks, including pinholes, may also be present on the surface
Discoloration: Ferrous staining from previous fasteners may be present
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)
MRc3: Materials Reuse
(materials used for this credit cannot be applied to MRc4 or MRc5)
MRc4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRc3 or MRc7)


MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.

Black & Tan

This reclaimed mix of Domestic Oak features hints of its original non-toxic black paint from its previous life as horse farm fencing deep in the grain and fissures of the smooth planed surface. An exciting blend of warm tones with varying lights and darks, you'll find occasional knots and a modest price point on these single width reclaimed planks.

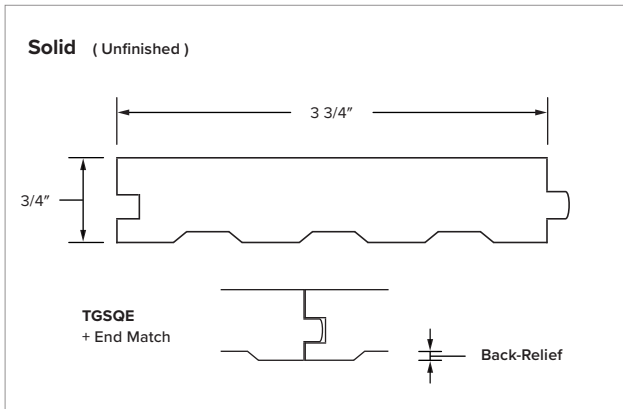



Unfinished

SKU# 13121810010