

American Gothic Ash

Reclaimed Ash is beloved for its neutral color tone and distinctive grain. Occasional knots, nail holes, and insect marks give this floor unmistakable authenticity.

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
 09 64 30 — Engineered Wood Flooring
 c06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
 1180 Commercial Dr
 Farmington, NY 14425

MATERIALS

Product: American Gothic Ash
Collection: Reclaimed
Species: Domestic Ash
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from cream to brown.

Unlimited color variation is inherent to the product.

Finish: Available in Naked, Pure, 5% White, Castle Brown, and Espresso

Hardness: 850

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In engineered prefinished product Voids up to 1" in diameter will be filled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered	Solid
FSC® Mix	FSC® Recycled 100%
Greenguard GOLD Certified	

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.


DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random <i>wider widths may be available upon request</i>	End Match:	Tongue and Groove
Length:	18" – 12' random	Back-Relief:	Included

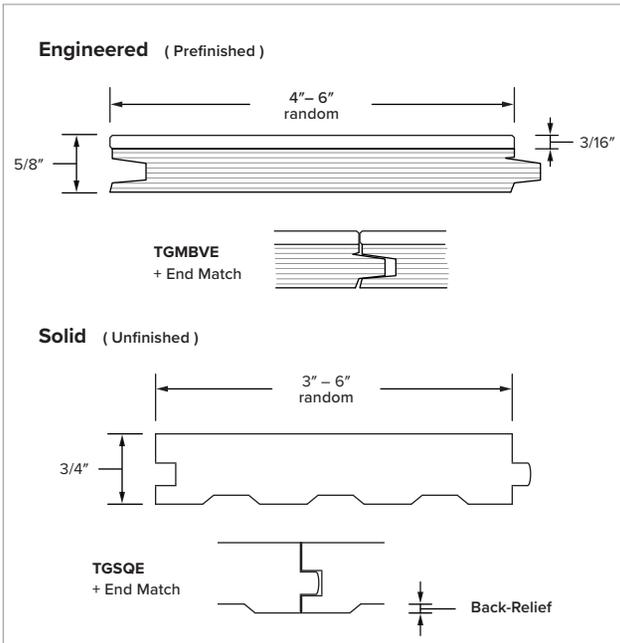



Unfinished

SKU# 23111210010



Naked

SKU# 23111210111



Pure

SKU# 23111210211



5% White

SKU# 23111211011



Espresso

SKU# 23111211111



Castle Brown

SKU# 23111211211