



**CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

**MANUFACTURER**

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

**MATERIALS**

**Product:** American Gothic Hickory  
**Collection:** Reclaimed  
**Species:** Domestic Hickory  
**Texture:** Smooth Planed  
**Source:** Agricultural Deconstruction  
**Color:** Tones may range from cream to brown.

*Unlimited color variation is inherent to the product.*

**Finish:** Available in Naked and Pure  
**Hardness:** 1820

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

**DIMENSIONS & MILLING**

**Solid** (Unfinished)

**Thickness:** 3/4"      **Profile + End Match:** TGSQE (Tongue and Groove Square Edge)

**Width:** 3" – 6" random  
*wider widths may be available upon request*      **Back-Relief:** Included

**Length:** 18" – 12' random

**ADDITIONAL INFORMATION**

**Heartwood:** No Restriction  
**Grain:** No Restriction  
**Knots:** No limitations on sound knots.  
*Surface defects from chipped or open knots may be present.*

**Texture:** Surface should generally be 95% clear of saw marks or patina.

**Voids:** In engineered prefinished product Voids up to 1" in diameter will be filled with a black composite.

*Insect marks, including pinholes, may also be present on the surface.*

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

**CERTIFICATIONS & LEED INFORMATION**

**FSC® Claim:** FSC® Recycled 100% (SCS-COC-003998-D)

**MRc3:** Materials Reuse  
*(materials used for this credit cannot be applied to MRc4 or MRc5)*

**MRc4:** Recycled Content, 100% Post-Consumer Recycled Content  
*(materials used for this credit cannot be applied to MRc3 or MRc7)*

**MRc5:** Regional Materials (call for details)

**INSTALLATION RECOMMENDATIONS**

**Overage:** Minimum 10% additional material  
*for on-site grading, trimming and installation factors.*


**Climate:** As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*

**American Gothic Hickory**

Dramatic contrasting knots and sapwood are the hallmarks of our reclaimed Hickory, typically salvaged from barns. It's the hardest of our domestic species and wears superbly. Expect chocolate and vanilla color tones, swirling grain, limited nail holes, and occasional insect marks that create a distinctive pattern.

**Solid** (Unfinished)

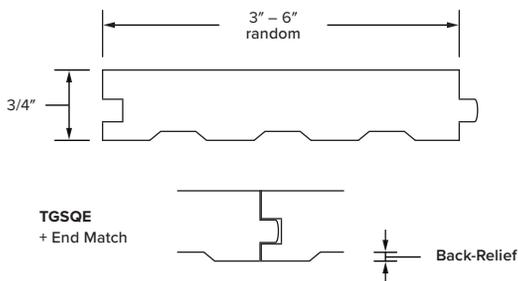



**Unfinished**

SKU# 13111610010



**Naked**

SKU# 13111610111



**Pure**

SKU# 13111610211