



American Gothic Chestnut

Nearly driven to extinction by a fungal blight in the early 20th century, Chestnut is one of the few woods that are only available as reclaimed lumber. Our Chestnut is sourced from barns and reveals glowing golds and rich browns when fully milled.

Engineered (Prefinished)

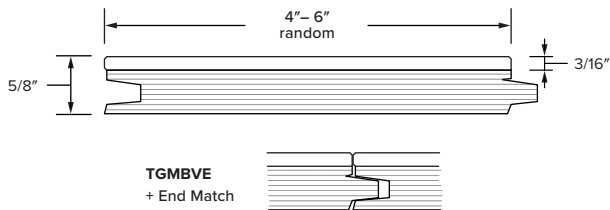

Solid (Unfinished)

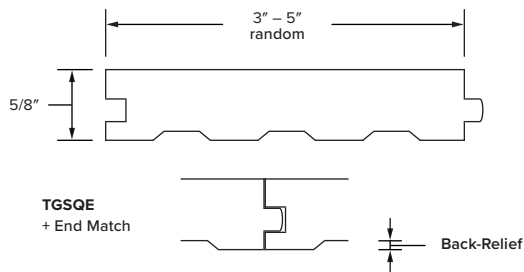

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

- 09 64 20 — Reclaimed Wood Flooring
- 09 64 30 — Engineered Wood Flooring
- 06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Gothic Chestnut
Collection: Reclaimed
Species: Domestic Chestnut
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from gold to brown.

Unlimited color variation is inherent to the product.

Finish: Available in Naked and Pure

Hardness: 540

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	5/8"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 5" random <i>wider widths may be available upon request</i>	Back-Relief:	Included
Length:	18" – 12' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In engineered prefinished product voids up to 1" in diameter will be filled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered	Solid
FSC® Mix	FSC® Recycled 100%

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13111310010



Naked

SKU# 13111310111



Pure

SKU# 13111310211