



Premium Select Mixed Grain Heart Pine

Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. The Premium Select Mixed Grain is sorted for dense grain and limited knots and nail holes, while leaving a variety of grain patterns. It's a little more playful than its vertical grain cousin—lending a casual elegance.

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

- 09 64 20 — Reclaimed Wood Flooring
- 09 64 30 — Engineered Wood Flooring
- 06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
 1180 Commercial Dr
 Farmington, NY 14425

MATERIALS

Product: Premium Select Mixed Grain Heart Pine
Collection: Reclaimed
Species: Domestic Heart Pine
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range widely from yellow to amber.

Unlimited color variation is inherent to the product.

Grade: Premium Select Mixed Grain

Finish: Available in Naked and Pure

Hardness: 1200

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: 85% or greater heartwood content
Grain: 90% or greater dense grain (8 rings or more per inch)
Knots: Overall appearance should be 90% clear of knots.
An average of one knot per 6 LF is permissible. Knots should not exceed 3/4" in diameter.

Texture: Surface should be 100% clear of saw marks or patina.

Voids: Occasional nail holes up to 3/16" in diameter may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: No checking permitted.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered	Solid
FSC® Mix	FSC® Recycled 100%
Greenguard GOLD Certified	

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)


INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.

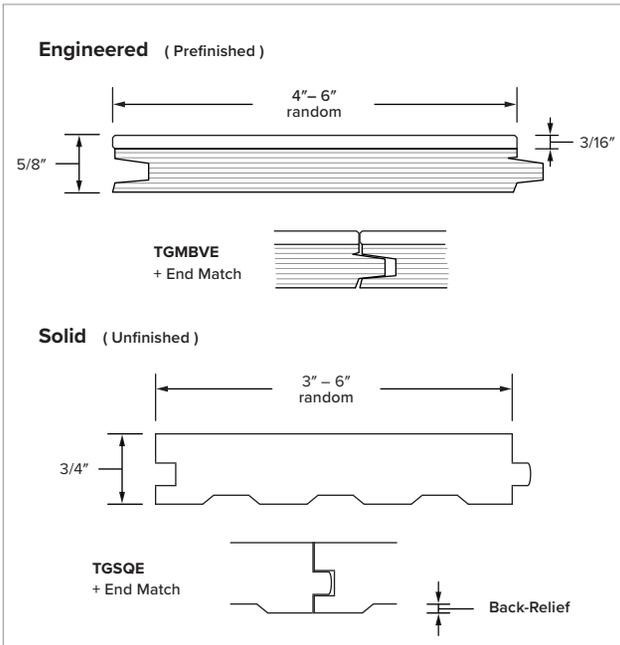

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness: 5/8"

Profile + End Match: **TGM BVE** (Tongue and Groove Micro-Bevel Edge)

Width: 4" – 6" random
wider widths may be available upon request

Wear Layer: 3/16"

Length: 18" – 12' random

Core: 1/2"

Solid (Unfinished)

Thickness: 3/4"

Profile + End Match: **TGSQE** (Tongue and Groove Square Edge)

Width: 3" – 6" random
wider widths may be available upon request

Back-Relief: Included

Length: 18" – 12' random



Unfinished

SKU# 23252310010



Naked

SKU# 23252310111



Pure

SKU# 23252310211