





## Character Select Heart Pine

Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. Our Character Select grade offers lively grain variation, knots, nail holes, swirling colors—durability, character, and history in one.

### Engineered (Prefinished)

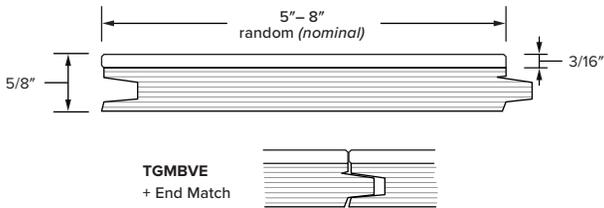

### Solid (Unfinished)

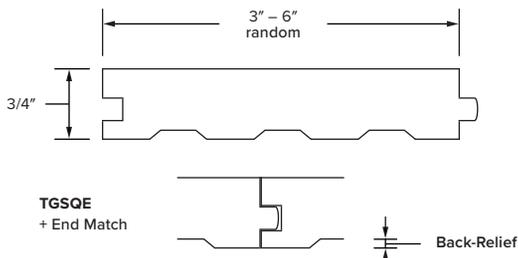

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

- 09 64 20 — Reclaimed Wood Flooring
- 09 64 30 — Engineered Wood Flooring
- 06 42 00 — Wood Paneling

### MANUFACTURER

**Pioneer Millworks**  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

**Product:** Character Select Heart Pine  
**Collection:** Reclaimed  
**Species:** Domestic Heart Pine  
**Core:** 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
**Texture:** Smooth Planed      **Grade:** Character Select  
**Source:** Industrial deconstruction  
**Color:** Tones may range widely from yellow to amber.

*Unlimited color variation is inherent to the product.*

**Finish:** Available in Naked and Pure

**Hardness: 1200**

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

#### Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)
Width:	5" – 8" random (nominal)	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

#### Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	<b>TGSQE</b> (Tongue and Groove Square Edge)
Width:	3" – 6" random wider widths may be available upon request	End Match:	Tongue and Groove
Length:	18" – 12' random	Back-Relief:	Included

### ADDITIONAL INFORMATION

**Heartwood:** 70% or greater heartwood content

**Grain:** No restriction

**Knots:** No limitations on sound knots.

*Surface defects from chipped or open knots may be present. Knots typically should not exceed 2" in diameter.*

**Texture:** Surface is fully planed and clear of saw marks and patina.

**Voids:** In engineered prefinished product voids up to 1" in diameter will be filled with a black composite.

*Insect marks, including pinholes, may also be present on the surface.*

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

**FSC® Claim:** SCS-COC-003998-D

<b>Engineered</b>	<b>Solid</b>
FSC® Mix	FSC® Recycled 100%

**MRC3:** Materials Reuse

*(materials used for this credit cannot be applied to MRC4 or MRC5)*

**MRC4:** Recycled Content, 100% Post-Consumer Recycled Content

*(materials used for this credit cannot be applied to MRC3 or MRC7)*

**MRC5:** Regional Materials (call for details)

### INSTALLATION RECOMMENDATIONS

**Overage:** Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*



**Unfinished**

SKU# 23172310010



**Naked**

SKU# 23172310111



**Pure**

SKU# 23172310211