



Grandma's Attic Granary

A mix of softwood species, carefully selected for its original patina and partially planed to leave much of the texture intact, Grandma's Attic is a casual and authentic take on reclaimed wood for floors or walls. Once installed, it has a way of looking like it's been there forever.

Solid (Unfinished)

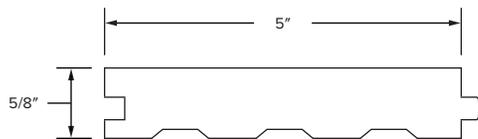

TGSQE
Non-End Match



CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks East
1180 Commercial Dr
Farmington, NY 14425

Pioneer Millworks West
2655 NE Orchard Ave
McMinnville, OR 97128

MATERIALS

Product: Grandma's Attic Granary

Collection: Reclaimed

Species: Domestic Softwoods

Texture: Skip-Planed / Original Patina

Source: Agricultural/Industrial deconstruction

Color: Tones may range from gold to brown to grey.

Unlimited color variation is inherent to the product.

Finish: Available in Unfinished and Pure.

Hardness: 380

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Solid (Unfinished)

Thickness: 5/8"

Profile: TGSQE
(Tongue and Groove
Square Edge)

Width: 5"

Length: 18"– 12' random

ADDITIONAL INFORMATION

Heartwood: No restriction

Grain: No restriction

Knots: No limitations on sound knots.

surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

Material surfaced so that 60% of original patina remains with nearly all boards having some patina. Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.

Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)


INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.


Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.

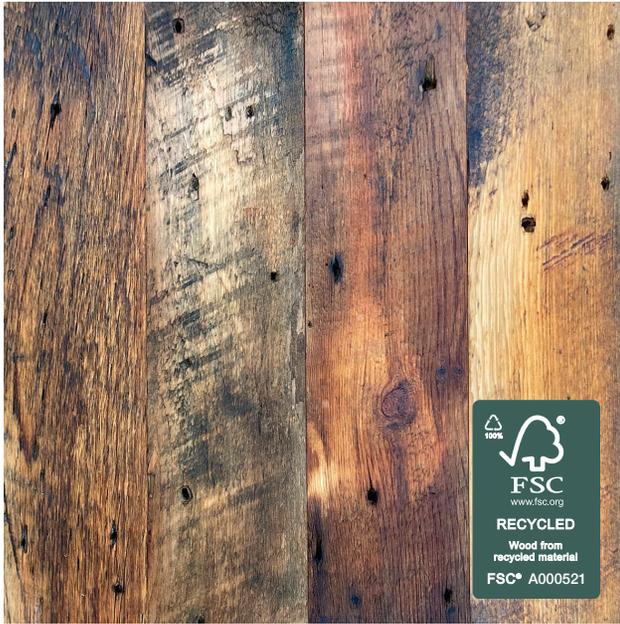


Unfinished

SKU# 13462410010

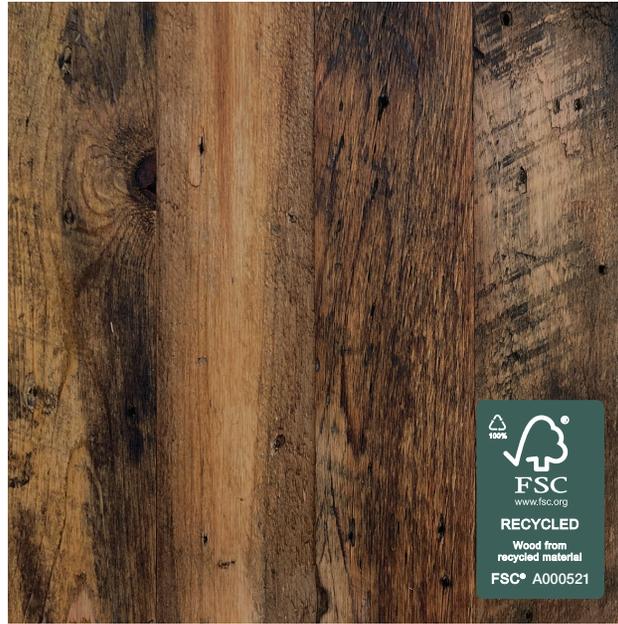

Pure

SKU# 13462410210

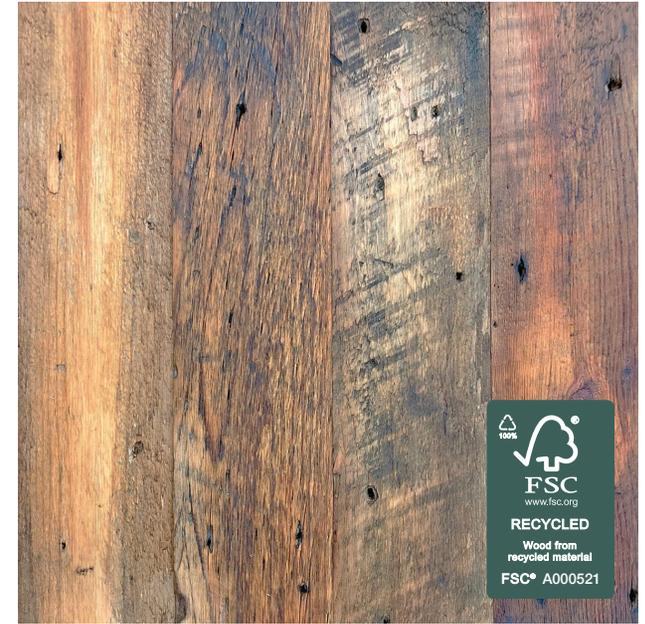

Clear Sealer + FRT

SKU# 13462411510