



## Clean Ash

Sophisticated, warm, and chic this line offers a twist on classically elegant species, matching function with contemporary farmhouse style. Showcasing modern flare with a more uniform appearance than its reclaimed counterpart, this high grade of Ash is sourced from forests which are carefully managed to strict Forest Stewardship Council® (FSC®) requirements. Celebrated in natural, fresh-sawn tones, expect consistent hues ranging from cream to light brown, relaxed grain patterns, and as a few small knots. This sustainably harvested wood pairs especially well with our custom eco-friendly finishes for flooring and paneling.

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

Product: Clean Ash

Collection: Modern Farmhouse

Species: Domestic Ash

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed      Grade: Clean

Source: Sustainably Harvested Forests

Color: Tones may range from cream to brown.

*Unlimited color variation is inherent to the product.*

Finish: Available in Naked, Pure, 5% White, Castle Brown, and Espresso

Hardness: 1320

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Engineered ( Prefinished )

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" - 6" as specified (nominal)	Wear Layer:	3/16"
Length:	18" - 12' random	Core:	1/2"

### ADDITIONAL INFORMATION

Heartwood: 75% or greater Heartwood

Grain: Clear

Knots: Primarily free of knots.

*Existing knots generally do not exceed 1/2" in diameter.*

Voids: No voids are permitted.

Discoloration: Limited mineral staining is permitted.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered

FSC® Mix

Greenguard GOLD Certified

MRc5: Regional Materials (call for details)

### INSTALLATION RECOMMENDATIONS


Overage: Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*

### Engineered ( Prefinished )

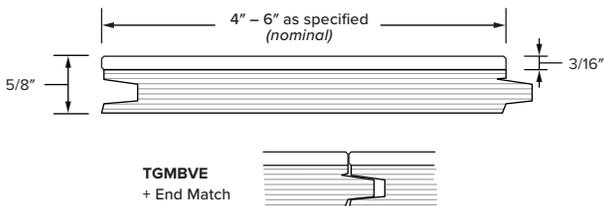



**Unfinished**

SKU# 22181210010



**Naked**

SKU# 22181210111



**Pure**

SKU# 22181210211



**5% White**

SKU# 22181211011



**Espresso**

SKU# 22181211111



**Castle Brown**

SKU# 22181211211