



## Clean Walnut

Sophisticated, warm, and chic this line offers a twist on classically elegant species, matching function with contemporary farmhouse style. Showcasing modern flare with a more uniform appearance than its reclaimed counterpart, this high grade of Walnut is sourced from carefully managed forests. Celebrated in natural, fresh-sawn tones, expect consistent hues ranging from brown to purple, relaxed grain patterns, and a few small knots. This sustainably harvested wood pairs especially well with our custom eco-friendly finishes for flooring and paneling.

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

Product: Clean Walnut

Collection: Modern Farmhouse

Species: Domestic Walnut

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed      Grade: Clean

Source: Sustainably Harvested Forests

Color: Tones may range from brown to purple.

*Unlimited color variation is inherent to the product.*

Finish: Available in Unfinished, Naked, and Pure

Hardness: 1010

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### ADDITIONAL INFORMATION

Heartwood: 75% or greater Heartwood

Grain: Clear

Knots: Primarily free of knots.

*Existing knots generally do not exceed 12" in diameter.*

Voids: No voids are permitted.

Discoloration: Limited mineral staining is permitted.

Checks: Only minor surface checking is permitted.

Moisture Content: Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC® Claim: None

Greenguard GOLD Certified

MRC5: Regional Materials (call for details)

### INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.


*Environmental conditions consistently outside of these parameters could result in product performance issues.*

### DIMENSIONS & MILLING

Engineered ( Prefinished )

Thickness:	5/8"	Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)
Width:	4" - 6" as specified (nominal)	Wear Layer:	3/16"
Length:	18" - 12' random	Core:	1/2"

Engineered ( Prefinished )

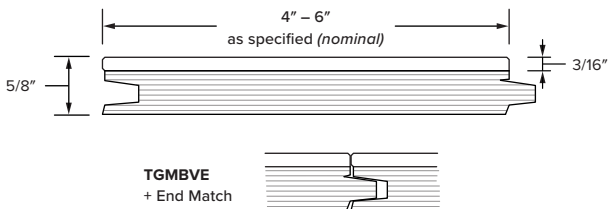



**Unfinished**

SKU# 22182010010



**Naked**

SKU# 22182010111



**Pure**

SKU# 22182010211