


SKU# 11431010017

## American Prairie Weathered Grey

Our take on barn wood paneling is broad and dynamic in scope. We incorporate wood that is salvaged not just from barns but also from agricultural fencing land other structures that have endured the elements. Weathered Grey is sorted for a mix of tones from silver to charcoal, selected from the boards that spent their previous life standing up to the elements and oxidizing to the perfect blend of greys.

**Solid** (Unfinished)

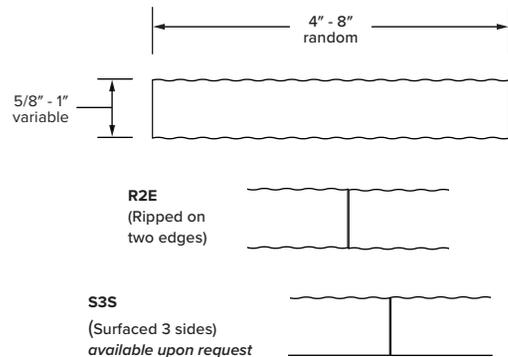

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 05 55—Reclaimed Wood Products & Materials

06 42 00—Wood Paneling

07 46 23—Wood Siding

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

**Product:** American Prairie Weathered Grey

**Collection:** American Prairie

**Species:** Domestic Mixed Hardwoods and/or Softwoods

**Texture:** Original Patina

**Source:** Agricultural/Industrial Deconstruction

**Color:** Tones may range from dark to silver grey.

*Unlimited color variation is inherent to the product.*

**Finish:** Unfinished unless specified otherwise

**Hardness:** 420–1100

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

**Solid** (Unfinished)

Thickness:	5/8" - 1" variable	Profile:	<b>R2E</b> (Ripped on two edges)
Width:	4" - 8" random wider widths may be available upon request		<b>S3S</b> (Surfaced 3 sides) available upon request
Length:	18" - 12' random		

### ADDITIONAL INFORMATION

**Heartwood:** No restriction

**Grain:** No restriction

**Knots:** No limitations on sound knots.

*Surface defects from chipped or open knots may be present.*

**Texture:** This mixture shows a varied pattern of saw marks, wear patterns, colors and textures. Overwood of up to 1/4" can be expected.

**Voids:** Fastener holes and open knots can be present and may reach 2" in diameter. Larger voids are occasionally included to preserve long lengths.

*Surface defects from insect marks, including pin holes may be present.*

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

**FSC® Claim:** FSC® Recycled 100% (SCS-COC-003998-D)

**MRC3:** Materials Reuse

*(materials used for this credit cannot be applied to MRC4 or MRC5)*

**MRC4:** Recycled Content, 100% Post-Consumer Recycled Content

*(materials used for this credit cannot be applied to MRC3 or MRC7)*

**MRC5:** Regional Materials (call for details)

### INSTALLATION RECOMMENDATIONS

**Overage:** Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.