




SKU# 11411010017

American Prairie Taphouse

Our take on barn wood paneling is broad and dynamic in scope. We incorporate wood that is salvaged not just from barns, but also from agricultural fencing and other structures that have endured the elements. Our Taphouse grade incorporates both external boards that have weathered grey patina and interior boards that have retained a brown patina. Use in vertical or horizontal installations and both interior and exterior applications.

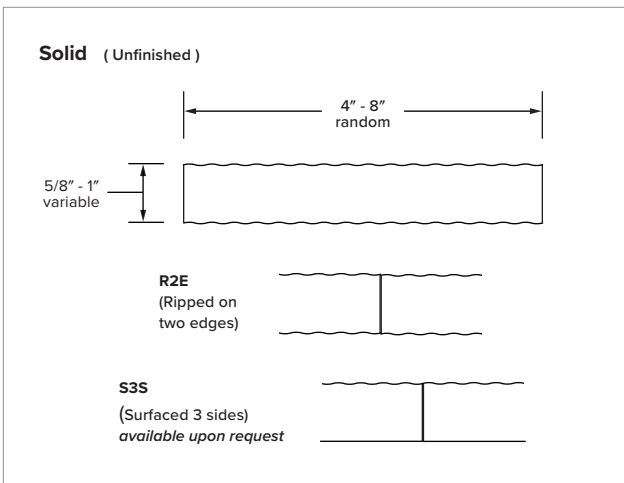

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

06 05 55—Reclaimed Wood Products & Materials

06 42 00—Wood Paneling

07 46 23—Wood Siding

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Prairie Taphouse

Collection: American Prairie

Species: Domestic Mixed Hardwoods and/or Softwoods

Texture: Original Patina

Source: Agricultural/Industrial Deconstruction

Color: Tones may range from brown to grey.

Unlimited color variation is inherent to the product.

Finish: Unfinished unless specified otherwise

Hardness: 420–1100

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Solid (Unfinished)

Thickness: 5/8" - 1"
variable

Profile: R2E
(Ripped on two edges)

Width: 4" - 8" random
wider widths may be
available upon request

S3S
(Surfaced 3 sides)
available upon request

Length: 18" - 12'
random

ADDITIONAL INFORMATION

Heartwood: No restriction

Grain: No restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures. Overwood of up to 1/4" can be expected.

Voids: Fastener holes and open knots can be present and may reach 2" in diameter. Larger voids are occasionally included to preserve long lengths.

Surface defects from insect marks, including pin holes may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.