

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

- 09 64 20 — Reclaimed Wood Flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
2655 NE Orchard Ave
McMinnville, OR 97128

MATERIALS

Product: Rugged Patina Indonesian Reclaimed Teak
Collection: Reclaimed Indonesian Teak
Species: Indonesian Teak
Core: 3-Ply Solid Core Construction 100% Teak
Texture: Rugged Patina
Source: Agricultural/Industrial deconstruction
Color: Tones may range from dark tan to chocolate brown.
Unlimited color variation is inherent to the product.

Grade: Rugged Patina

Finish: Unfinished or Available in Pure, White Wash, Donovan, Smoke, Straw, Sand Dune, Black Pepper, and Ebony. * shown Unfinished

Hardness: 1070

(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS

Engineered (Prefinished)

Thickness:	9/16"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	3 1/2" or 5 1/4" as specified wider widths may be available upon request	Wear Layer:	1/8"
Length:	2'-7' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

Overwood of up to 1/8" can be expected.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with plugs.

Discoloration: Ferrous staining from previous fasteners may be present. Some original paint remnants may also be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.

Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.


Environmental conditions consistently outside of these parameters could result in product performance issues.


Rugged Patina Indonesian Teak

We've searched the globe to bring you environmentally friendly and ethically sourced teak. This extremely versatile species is reclaimed from non-Burmese sources and is socially responsible—additionally, 1% of our teak sales are donated to the Borneo Project in their fight to end the loss of habitat for the indigenous peoples of Indonesia.

Our Patina grade is weathered by nature and time, celebrating the unmatched character of the 18th and 19th century plank. Tight grain makes Teak strong and durable, able to withstand the wear and tear of shoes, animals, and weather. Natural oils make it resistant to rot, insects, and fungi. Thanks to its water-resistant nature, consider including the warm tones and texture of Teak in place of tile in places like kitchens and baths. Add a color finish to customize your hue, use it indoors or outdoors, on vertical or horizontal surfaces—the versatility of teak makes it a valuable arsenal in any design tool-kit.


Engineered (Prefinished)

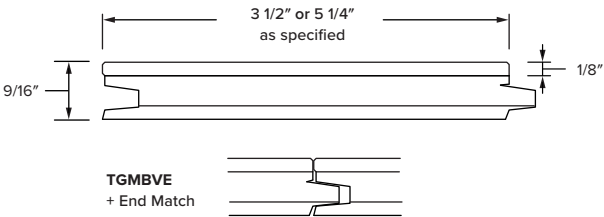

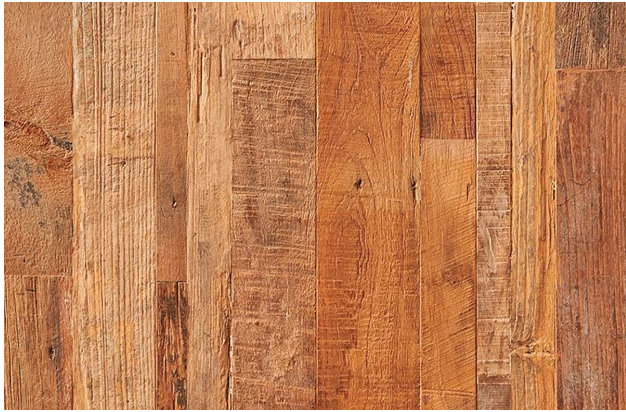

Unfinished

SKU# 24351910011

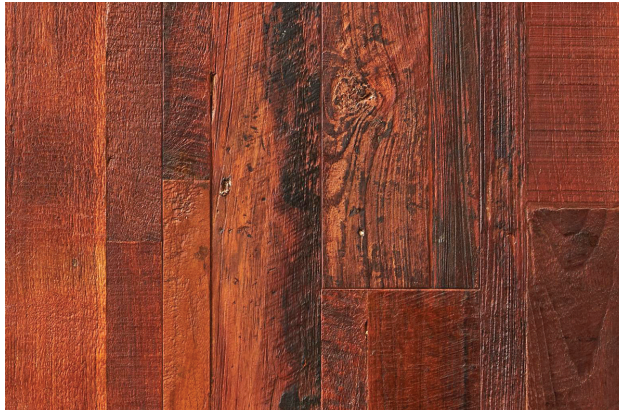

Pure

SKU# 24351910211



White Wash

SKU# 24351910311




Donovan

SKU# 24351910911



Sand Dune

SKU# 24351910611

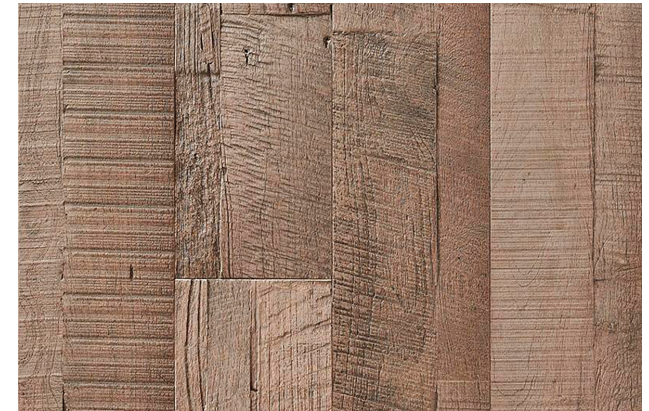


Smoke

SKU# 24351910411




Straw

SKU# 24351910511

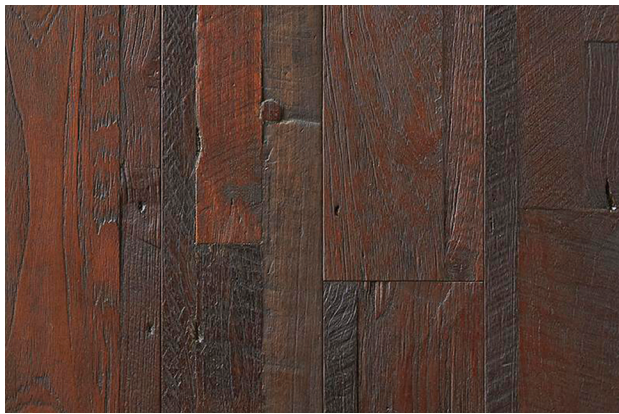

Black Pepper

SKU# 24351910711

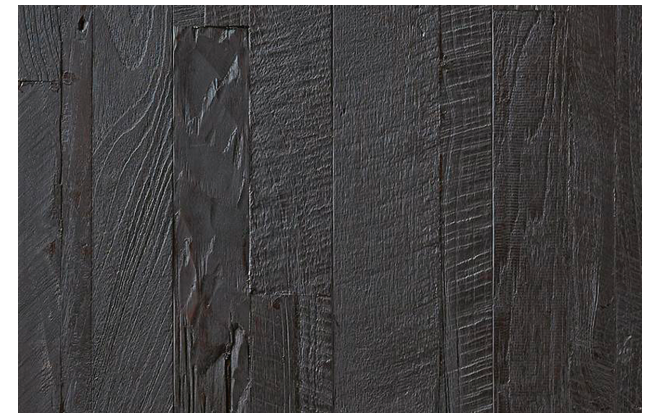

Ebony

SKU# 24351910811