



## 50/50

We take the black painted random mix of Red and White Oak boards salvaged from Kentucky horse farms and skip-plane the surface so that approximately 50% of the original paint remains. This makes for a stunning and durable reclaimed floor or wall with rock and roll character and a great story to tell.

### Solid (Unfinished)

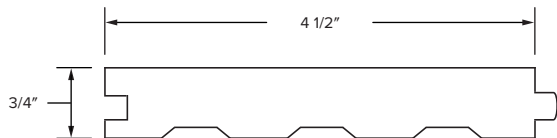

TGSQE  
Non-End Match



### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

### MATERIALS

Product: 50/50

Collection: Reclaimed

Species: Domestic Oak

Texture: Skip-Planed / Original Patina

Source: Agricultural Deconstruction

Color: Tones may range from tan to black.

*Unlimited color variation is inherent to the product.*

Finish: Unfinished unless specified otherwise.

Hardness: 1290

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Solid (Unfinished)

Thickness:	3/4"	Profile:	TGSQE (Tongue and Groove Square Edge)
Width:	4 1/2"	Back-Relief:	Included
Length:	12"– 6.5' random		

### ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

*Surface defects from chipped or open knots may be present.*

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

*Material is surfaced so that approximately 50% of the original black paint remains. Generally, 70% of boards have some paint remnants. Overwood of up to 1/8" can be expected.*

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.

*Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.*

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

*(materials used for this credit cannot be applied to MRc4 or MRc5)*

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

*(materials used for this credit cannot be applied to MRc3 or MRc7)*

MRc5: Regional Materials (call for details)

### INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*



**Unfinished**

SKU# 13131810010



**Pure**

SKU# 13131810210