

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Settlers' Plank Oak

Collection: Reclaimed

Species: Primarily Domestic Red and White Oak
—up to 20% may be other hardwood species

Texture: Skip-Planed / Original Patina

Source: Agricultural Deconstruction

Color: Tones may range from gold to brown to grey.
Unlimited color variation is inherent to the product.

Finish: Available in Naked and Pure.

Hardness: 1260-1360


(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING


Solid (Unfinished)

Thickness:	3/4"	Profile:	TGSQE (Tongue and Groove Square Edge)
Width	4" – 7" random <i>wider widths may be available upon request</i>	Back-Relief:	Included
Length:	18" – 12' random		

Solid (Unfinished)

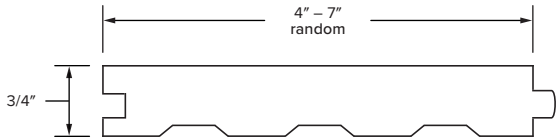

TGSQE
Non-End Match



ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

Material is surfaced so that approximately 50% of the original patina remains. Generally, 70% of boards have some patina. Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.

Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13391810010



Naked

SKU# 13391810110



Pure

SKU# 13391810210