

**CUT AND PASTE SPECIFICATION  
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

c06 42 00 — Wood Paneling

**MANUFACTURER**

**Pioneer Millworks**  
1180 Commercial Dr  
Farmington, NY 14425

**MATERIALS**

**Product:** American Gothic Ash  
**Collection:** Reclaimed  
**Species:** Domestic Ash  
**Core:** 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
**Texture:** Smooth Planed  
**Source:** Agricultural Deconstruction  
**Color:** Tones may range from cream to brown.

*Unlimited color variation is inherent to the product.*

**Finish:** Available in Naked, Pure, 5% White,  
Castle Brown, and Espresso

**Hardness: 850**

*(Janka Ball Test ASTM D1037-96A, Natural wood products  
have no minimum hardness since hardness is a  
characteristic of species and cannot be controlled)*

**DIMENSIONS & MILLING**

**Engineered (Prefinished)**

Thickness:	5/8"	Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

**Solid (Unfinished)**

Thickness:	3/4"	Profile + End Match:	<b>TGSQE</b> (Tongue and Groove Square Edge)
Width:	3" – 6" random <i>wider widths may be available upon request</i>	End Match:	Tongue and Groove
Length:	18" – 12' random	Back-Relief:	Included

**ADDITIONAL INFORMATION**

**Heartwood:** No Restriction

**Grain:** No Restriction

**Knots:** No limitations on sound knots.

*Surface defects from chipped or open knots may be present.*

**Texture:** Surface should generally be  
95% clear of saw marks or patina.

**Voids:** In engineered prefinished product  
Voids up to 1" in diameter will be  
filled with a black composite.

*Insect marks, including pinholes,  
may also be present on the surface.*

**Discoloration:** Ferrous staining from previous  
fasteners may be present.

**Checks:** Structural checks not affecting the integrity of  
the plank, once installed, are allowed and more  
prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling

**CERTIFICATIONS & LEED INFORMATION**

**FSC® Claim:** SCS-COC-003998-D

<b>Engineered</b>	<b>Solid</b>
FSC® Mix	FSC® Recycled 100%
Greenguard GOLD Certified	

**MRc3:** Materials Reuse

*(materials used for this credit cannot be applied to MRc4 or MRc5)*

**MRc4:** Recycled Content, 100% Post-Consumer Recycled Content

*(materials used for this credit cannot be applied to MRc3 or MRc7)*


**MRc5:** Regional Materials (call for details)

**INSTALLATION RECOMMENDATIONS**


**Overage:** Minimum 10% additional material  
*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood flooring product,  
the room temperature should be held  
at a consistent range between **60-80° F**  
with relative humidity between **30-60%**.  
*Environmental conditions consistently outside of these  
parameters could result in product performance issues.*

**Engineered (Prefinished)**

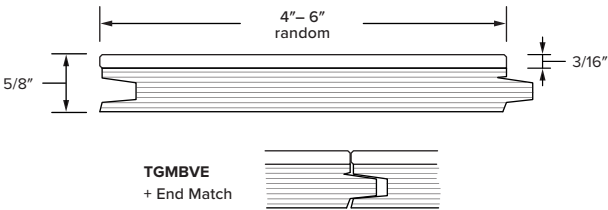

**Solid (Unfinished)**

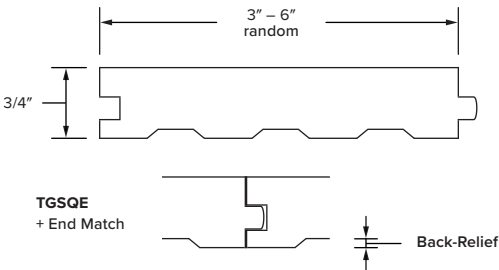





**Unfinished**

SKU# 23111210010



**Naked**

SKU# 23111210111



**Pure**

SKU# 23111210211




**5% White**

SKU# 23111211011



**Espresso**

SKU# 23111211111

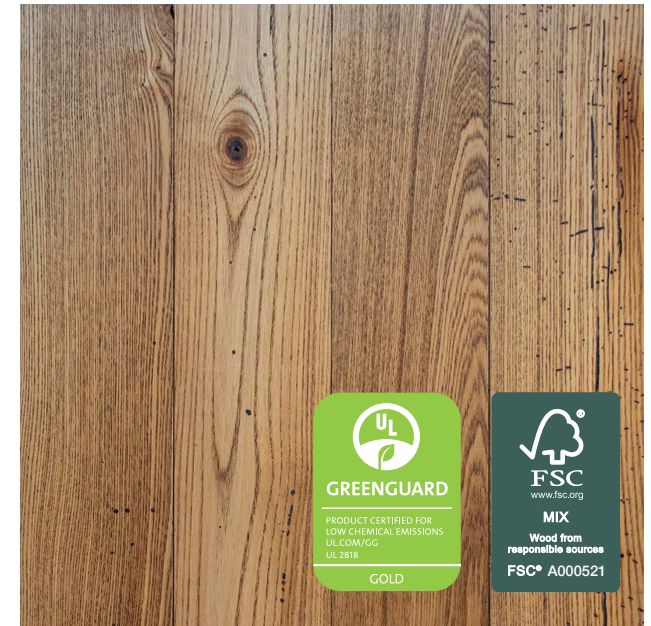

**Castle Brown**

SKU# 23111211211