



**CUT AND PASTE SPECIFICATION  
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

**MANUFACTURER**

Pioneer Millworks  
1180 Commercial Dr  
Farmington, NY 14425

**MATERIALS**

**Product:** American Gothic Elm  
**Collection:** Reclaimed  
**Species:** Domestic Elm  
**Core:** 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
**Texture:** Smooth Planed  
**Source:** Agricultural Deconstruction  
**Color:** Tones may range from cream to brown.

*Unlimited color variation is inherent to the product.*

**Finish:** Available in Naked and Pure  
**Hardness:** 750

*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

**ADDITIONAL INFORMATION**

**Heartwood:** No Restriction  
**Grain:** No Restriction  
**Knots:** No limitations on sound knots.  
*Surface defects from chipped or open knots may be present.*

**Texture:** Surface should generally be 95% clear of saw marks or patina.

**Voids:** In engineered prefinished product  
Voids up to 1" in diameter will be filled with a black composite.

*Insect marks, including pinholes, may also be present on the surface.*

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

**Moisture Content:** Kiln dried 6–9% prior to milling.

**CERTIFICATIONS & LEED INFORMATION**

**FSC® Claim:** SCS-COC-003998-D

**Engineered**                      **Solid**  
FSC® Mix                      FSC® Recycled 100%  
Greenguard GOLD Certified

**MRc3:** Materials Reuse

*(materials used for this credit cannot be applied to MRc4 or MRc5)*

**MRc4:** Recycled Content, 100% Post-Consumer Recycled Content  
*(materials used for this credit cannot be applied to MRc3 or MRc7)*

**MRc5:** Regional Materials (call for details)

**INSTALLATION RECOMMENDATIONS**


**Overage:** Minimum 10% additional material  
*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*


**American Gothic Elm**

Our native Elm has been decimated over the last century by Dutch Elm Disease, but we still find Grey and Red Elm when we salvage old barns, making our reclaimed Elm something rare and special. With a delicate and distinctive grain, along with cool and creamy colors, this species looks stunning in any setting—classic to contemporary. Like most reclaimed hardwoods, you can expect occasional nail holes, insect marks, and small dark knots.

**Engineered (Prefinished)**

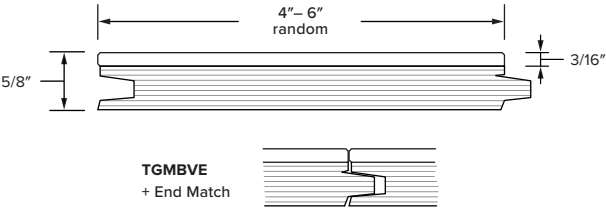

**Solid (Unfinished)**

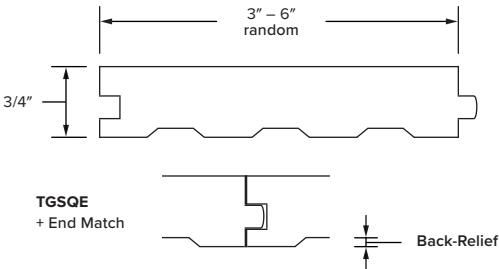

**DIMENSIONS & MILLING**

**Engineered (Prefinished)**

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random wider widths may be available upon request	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

**Solid (Unfinished)**

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random wider widths may be available upon request	Back-Relief:	Included
Length:	18" – 12' random		



**Unfinished**

SKU# 23111510010



**Naked**

SKU# 23111510111



**Pure**

SKU# 23111510211