



**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Pemium Select Mixed Grain Heart Pine

Collection: Reclaimed

Species: Domestic Heart Pine

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed

Source: Agricultural Deconstruction

Color: Tones may range widely from yellow to amber.

Unlimited color variation is inherent to the product.

Grade: Premium Select Mixed Grain

Finish: Available in Naked and Pure

Hardness: 1200

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random <i>wider widths may be available upon request</i>	Back-Relief:	Included
Length:	18" – 12' random		

ADDITIONAL INFORMATION

Heartwood: 85% or greater heartwood content

Grain: 90% or greater dense grain
(8 rings or more per inch)

Knots: Overall appearance should be 90% clear of knots.

*An average of one knot per 6 LF is permissible.
Knots should not exceed 3/4" in diameter.*

Texture: Surface should be 100% clear of saw marks or patina.

Voids: Occasional nail holes up to 3/16"
in diameter may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: No checking permitted.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered	Solid
FSC® Mix	FSC® Recycled 100%
Greenguard GOLD Certified	

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)


INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

Environmental conditions consistently outside of these parameters could result in product performance issues.

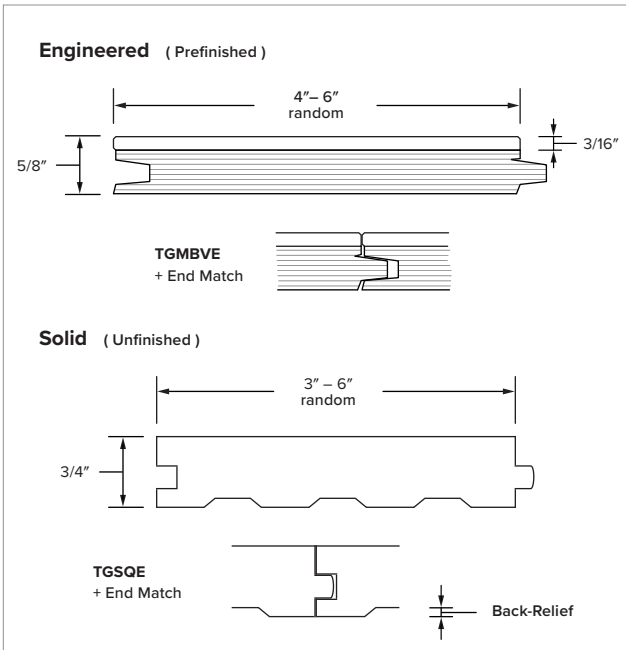



Unfinished

SKU# 23252310010



Naked

SKU# 23252310111



Pure

SKU# 23252310211