


Clean Ash

Sophisticated, warm, and chic this line offers a twist on classically elegant species, matching function with contemporary farmhouse style. Showcasing modern flare with a more uniform appearance than its reclaimed counterpart, this high grade of Ash is sourced from forests which are carefully managed to strict Forest Stewardship Council® (FSC®®) requirements. Celebrated in natural, fresh-sawn tones, expect consistent hues ranging from cream to light brown, relaxed grain patterns, and as a few small knots. This sustainably harvested wood pairs especially well with our custom eco-friendly finishes for flooring and paneling.

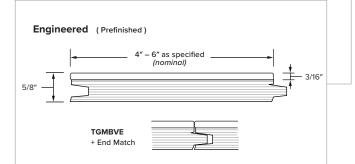

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

MATERIALS

Product: Clean Ash Collection: Modern Farmhouse Species: Domestic Ash Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood Texture: Smooth Planed Grade: Clean Source: Sustainably Harvested Forests Color: Tones may range from cream to brown. Unlimited color variation is inherent to the product.

Finish: Available in Naked, Pure, 5% White, Castle Brown, and Espresso

Hardness: 1320

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Engineered (Prefinished)

TGMRVE Profile Thickness: 5/8" (Tongue and Groove + End Match: Micro-Bevel Edge) 4" - 6" Width: 3/16" Wear Layer: as specified (nominal) 18"-12' Lenath: 1/2" Core[.] random

ADDITIONAL INFORMATION

Heartwood: 75% or greater Heartwood

Grain: Clear

Knots: Primarily free of knots. Existing knots generally do not exceed 1/2" in diameter.

Voids: No voids are permitted.

Discoloration: Limited mineral staining is permitted.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6-9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered

FSC[®] Mix

Greenguard GOLD Certified

MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

Environmental conditions consistently outside of these parameters could result in product performance issues.





Unfinished

5% White

SKU# 22181210010

SKU# 22181211011

UL P / ~ FSC MIX Wood from ponsible sources FSC* A000521









Naked

SKU# 22181210111

SKU# 22181210211



SKU# 22181211211