

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

**Pioneer Millworks**  
2655 NE Orchard Ave  
McMinnville, OR 97128

### MATERIALS

**Product:** Wire Brushed Indonesian Reclaimed Teak  
**Collection:** Reclaimed Indonesian Teak  
**Species:** Indonesian Teak  
**Core:** 3-Ply Solid Core Construction 100% Teak  
**Texture:** Wire-Brushed  
**Source:** Agricultural/Industrial deconstruction  
**Color:** Tones may range from golden tan to toffee brown.

*Unlimited color variation is inherent to the product.*

**Grade:** Wire Brushed

**Finish:** Unfinished or Available in Pure, White Wash, Donovan, Smoke, Straw, Sand Dune, Black Pepper, and Ebony. \* *shown Unfinished*

**Hardness:** 1070

*(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS

#### Engineered ( Prefinished )

Thickness:	9/16"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	3 1/2" or 5 1/4" as specified <i>wider widths may be available upon request</i>	Wear Layer:	1/8"
Length:	2'–7' random		

### ADDITIONAL INFORMATION

**Heartwood:** No Restriction

**Grain:** No Restriction

**Knots:** No limitations on sound knots.

*Surface defects from chipped or open knots may be present.*

**VOIDS:** Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with plugs.

**Discoloration:** Ferrous staining from previous fasteners may be present.

**Checks:** Structural checks not affecting the integrity of the plank, once installed, are allowed.

**Moisture Content:** Kiln dried 6–9% prior to milling

### CERTIFICATIONS & LEED INFORMATION

**FSC® Claim:** FSC® Recycled 100% (SCS-COC-003998-D)

**MRC3:** Materials Reuse

*(materials used for this credit cannot be applied to MRC4 or MRC5)*

**MRC4:** Recycled Content, 100% Post-Consumer Recycled Content

*(materials used for this credit cannot be applied to MRC3 or MRC7)*


### INSTALLATION RECOMMENDATIONS

**Overage:** Minimum 10% additional material

*for on-site grading, trimming and installation factors.*

**Climate:** As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these parameters could result in product performance issues.*

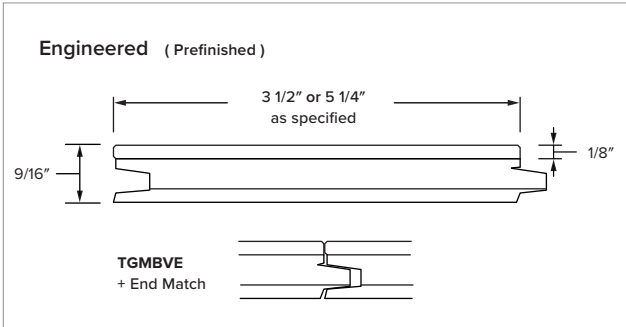






**Unfinished**

SKU# 24441910011

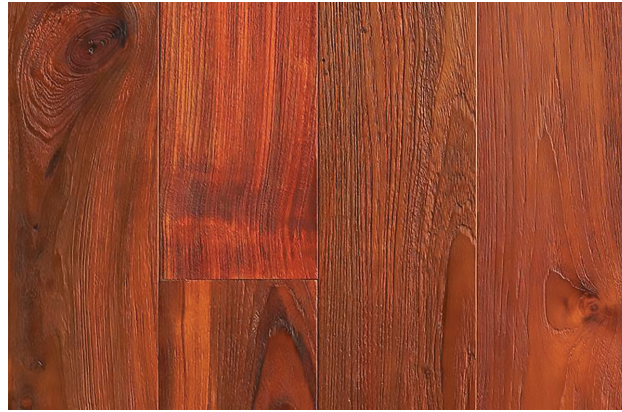

**Pure**

SKU# 24441910211




**White Wash**

SKU# 24441910311




**Donovan**

SKU# 24441910911

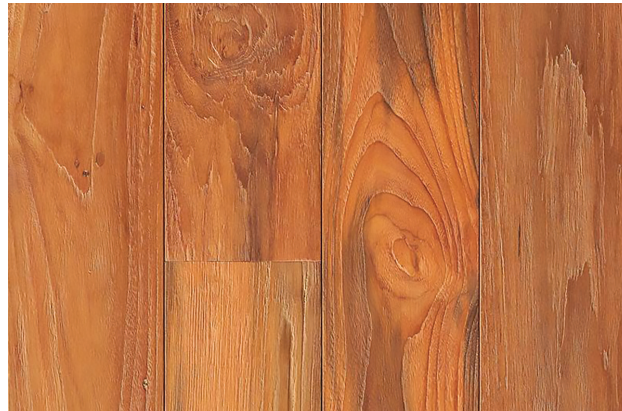


**Sand Dune**

SKU# 24441910611

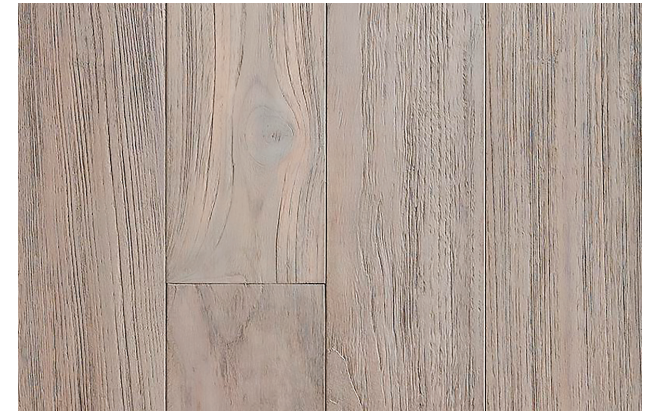


**Smoke**

SKU# 24441910411

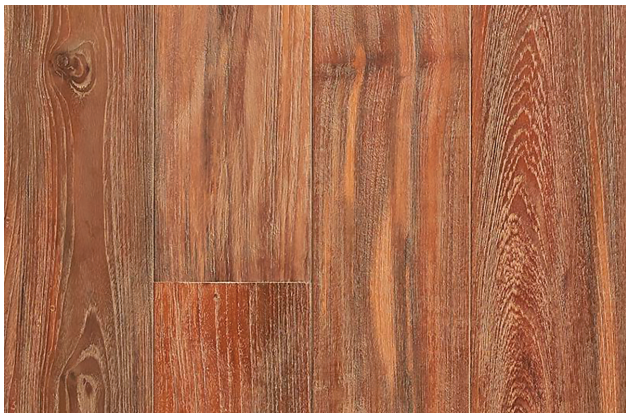

**Straw**

SKU# 24441910511

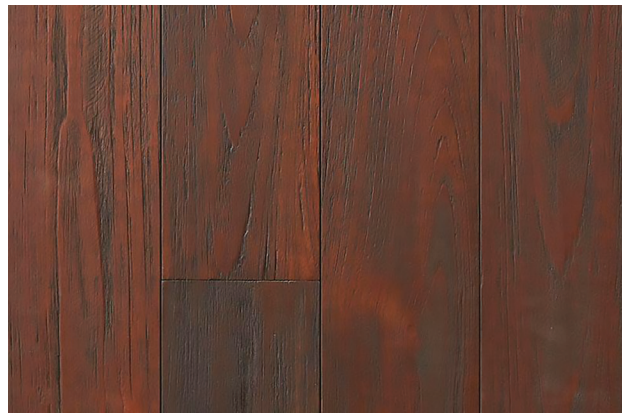

**Black Pepper**

SKU# 24441910711



**Ebony**

SKU# 24441910811