

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
2655 NE Orchard Ave
McMinnville, OR 97128

MATERIALS

Product: Rugged Patina Indonesian Reclaimed Teak
Collection: Reclaimed Indonesian Teak
Species: Indonesian Teak
Core: 3-Ply Solid Core Construction 100% Teak
Texture: Rugged Patina
Source: Agricultural/Industrial deconstruction
Color: Tones may range from dark tan to chocolate brown.

Unlimited color variation is inherent to the product.

Grade: Rugged Patina

Finish: Unfinished or Available in Pure, White Wash, Donovan, Smoke, Straw, Sand Dune, Black Pepper, and Ebony. * shown Unfinished

Hardness: 1070

(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS

Engineered (Prefinished)

Thickness: 9/16" Profile + End Match: TGBEVE (Tongue and Groove Micro-Bevel Edge)

Width: 3 1/2" or 5 1/4" as specified Wear Layer: 1/8"

wider widths may be available upon request

Length: 2'-7' random

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

Overwood of up to 1/8" can be expected.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with plugs.

Discoloration: Ferrous staining from previous fasteners may be present. Some original paint remnants may also be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.

Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)


INSTALLATION RECOMMENDATIONS


Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%.**


Environmental conditions consistently outside of these parameters could result in product performance issues.

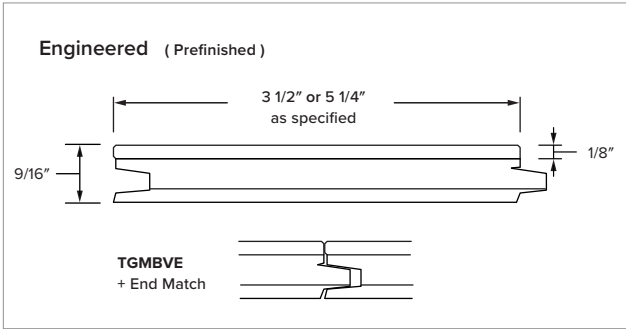

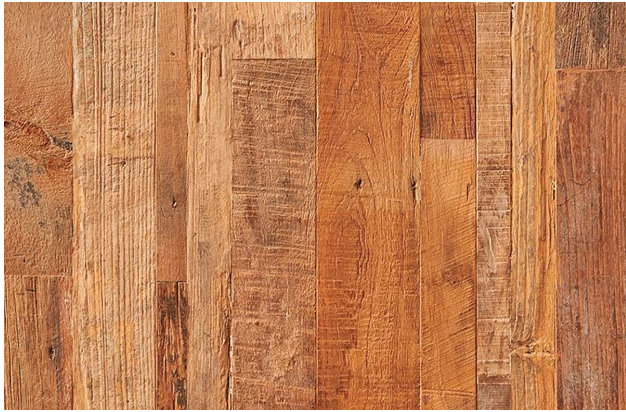

Unfinished

SKU# 24351910011

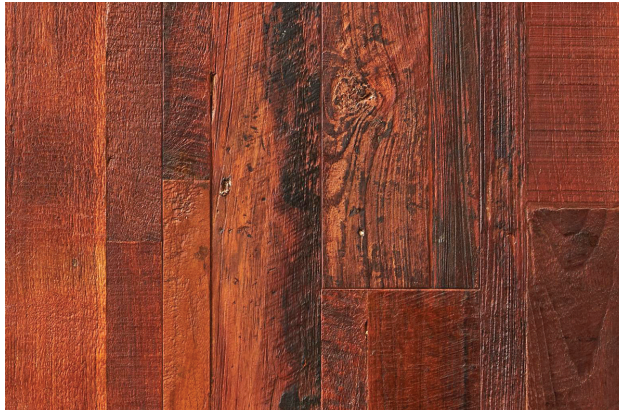

Pure

SKU# 24351910211



White Wash

SKU# 24351910311




Donovan

SKU# 24351910911



Sand Dune

SKU# 24351910611

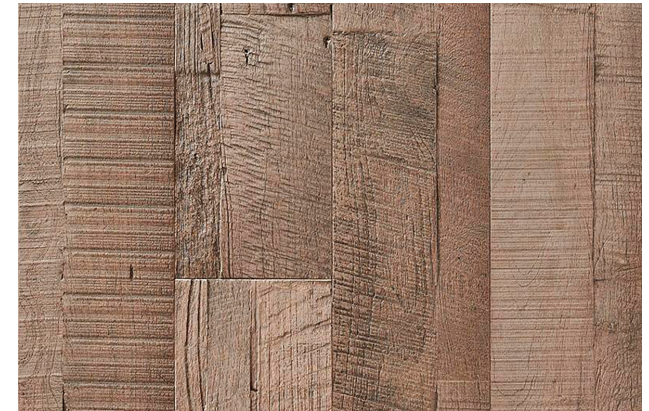


Smoke

SKU# 24351910411




Straw

SKU# 24351910511

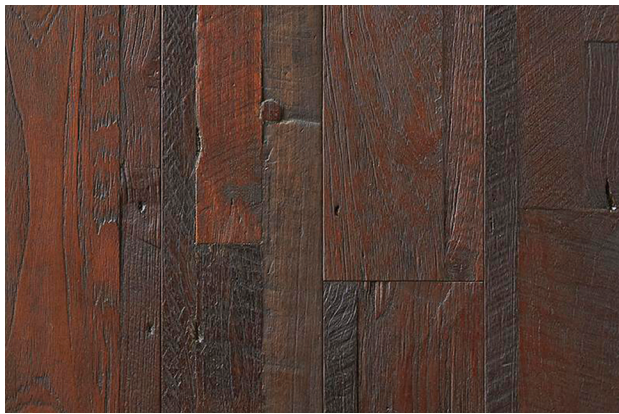

Black Pepper

SKU# 24351910711

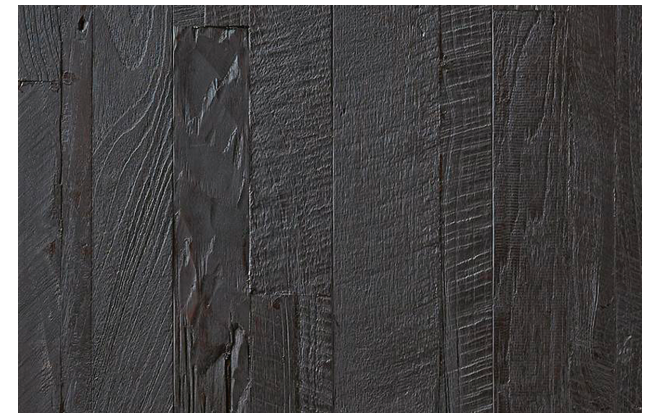

Ebony

SKU# 24351910811