



**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Gothic Elm
Collection: Reclaimed
Species: Domestic Elm
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from cream to brown.

Unlimited color variation is inherent to the product.

Finish: Available in Naked and Pure
Hardness: 750

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In engineered prefinished product Voids up to 1" in diameter will be filled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered **Solid**
FSC® Mix FSC® Recycled 100%
Greenguard GOLD Certified

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content
(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS


Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.
Environmental conditions consistently outside of these parameters could result in product performance issues.


American Gothic Elm

Our native Elm has been decimated over the last century by Dutch Elm Disease, but we still find Grey and Red Elm when we salvage old barns, making our reclaimed Elm something rare and special. With a delicate and distinctive grain, along with cool and creamy colors, this species looks stunning in any setting—classic to contemporary. Like most reclaimed hardwoods, you can expect occasional nail holes, insect marks, and small dark knots.

Engineered (Prefinished)

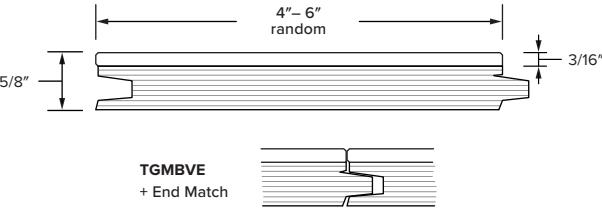

Solid (Unfinished)

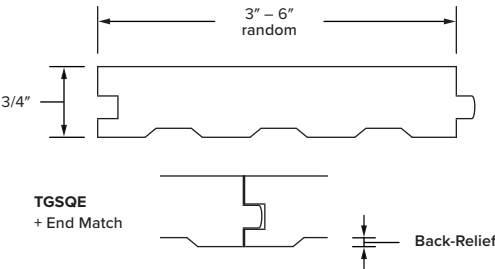

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGBMVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random wider widths may be available upon request	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random wider widths may be available upon request	Back-Relief:	Included
Length:	18" – 12' random		



Unfinished

SKU# 23111510010



Naked

SKU# 23111510111



Pure

SKU# 23111510211