

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
2655 NE Orchard Ave
McMinnville, OR 97128

MATERIALS

Product: Bright Indonesian Reclaimed Teak

Collection: Reclaimed Indonesian Teak

Species: Indonesian Teak

Core: 3-Ply Solid Core Construction 100% Teak

Texture: Smooth planed

Source: Agricultural/Industrial deconstruction

Color: Tones may range from golden tan to toffee brown.

Unlimited color variation is inherent to the product.

Grade: Bright

Finish: Unfinished or Available in Pure, White Wash,
Donovan, Smoke, Straw, Sand Dune,
Black Pepper, and Ebony. * shown in Pure

Hardness: 1070

*(Janka Ball Test ASTM D143, Natural wood products
have no minimum hardness since hardness is a
characteristic of species and cannot be controlled)*

DIMENSIONS

Engineered (Prefinished)

Thickness:	9/16"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	3 1/2" or 5 1/4" as specified <i>wider widths may be available upon request</i>	Wear Layer:	1/8"
Length:	2'-7' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter. Voids up to 2" in diameter may be filled with plugs.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed.

Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)


INSTALLATION RECOMMENDATIONS


Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.


Environmental conditions consistently outside of these parameters could result in product performance issues.

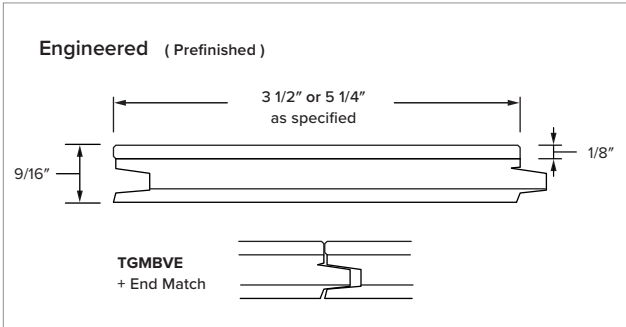

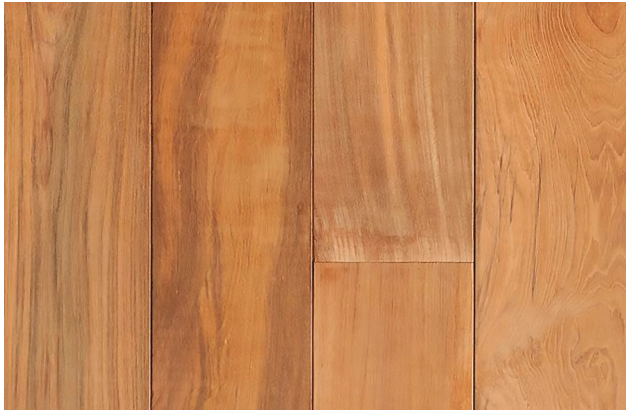

Unfinished

SKU# 24141910011

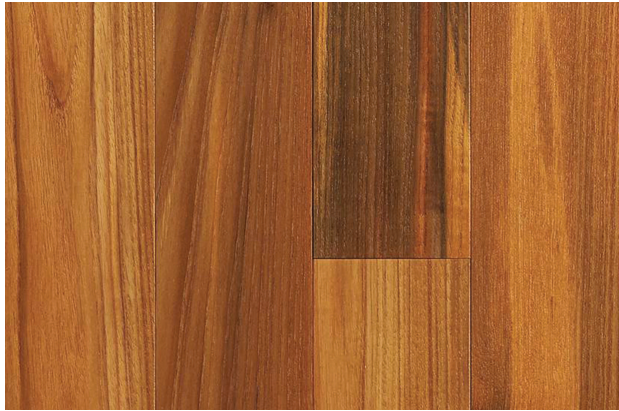


Pure

SKU# 24141910211




White Wash

SKU# 24141910311

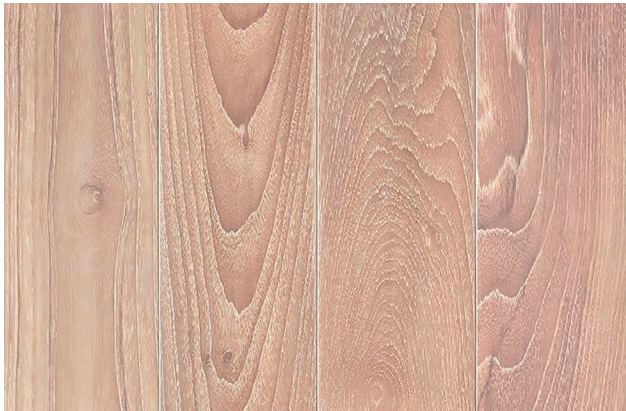

Donovan

SKU# 24141910911

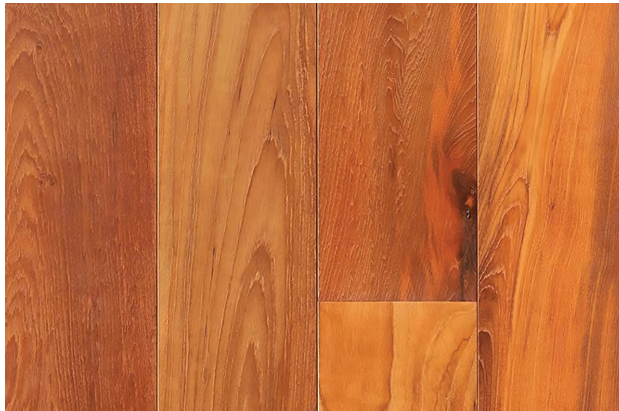


Sand Dune

SKU# 24141910611




Smoke

SKU# 24141910411

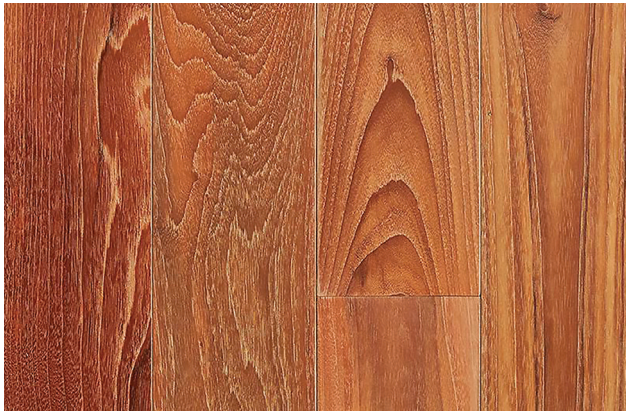


Straw

SKU# 24141910511

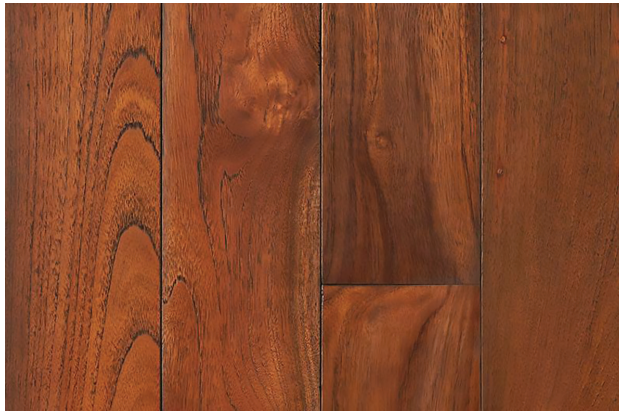

Black Pepper

SKU# 24141910711

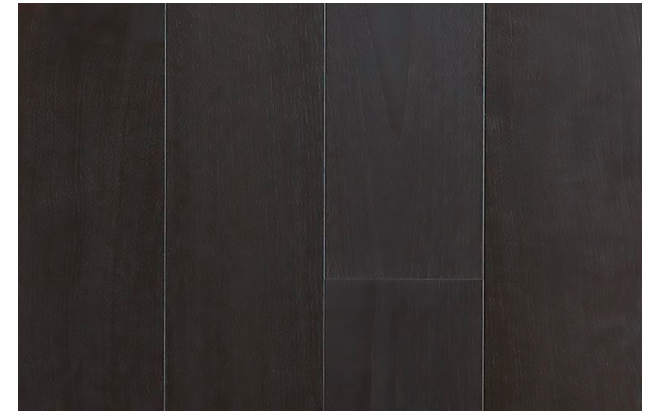

Ebony

SKU# 24141910811