


Sunset Collection

Reclaimed oak is the sturdy foundation of our Sunset Collection. Sourced from the iconic four rail fences that reign in fertile Kentucky pasturelands; these rescued planks corralled stoic thoroughbreds for decades. Our proprietary milling techniques preserve the oak's historic character, illustrating the detail in the grains and fissures from its previous life. Engineered for both stability and ease of installation, our Sunset Collection employs an all-natural plant-based UV Cured Hard-Wax Oil finish that is easy to maintain, durable, and safe for people, animals and the planet.

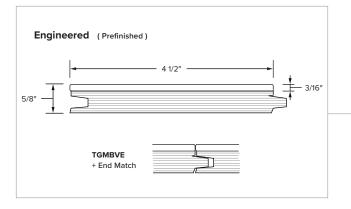

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

MATERIALS

Product: Sunset Collection Reclaimed Oak

Collection: Sunset Collection

Species: Domestic Oak

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed

Source: Agricultural Deconstruction

Color: Tones may range from tan to brown and neutral tones.

Unlimited color variation is inherent to the product.

Finish: Naked, Pure, Canyon, Roan, Sabino, Nubuck, Dark Bay

Hardness: 1290

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8″	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4 1/2"	Wear Layer:	3/16"
Length:	12"- 6.5' random	Core:	1/2"

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In engineered prefinished product voids up to 1" in diameter will be flled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous

fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6-9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Mix (SCS-COC-003998-D)

Greenguard GOLD Certified

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

Environmental conditions consistently outside of these parameters could result in product performance issues.









Pure SKU# 29121810211

Canyon SKU# 29122117911







Roan SKU# 29122118011

Sabino SKU# 29121817811

Nubuck SKU# 29121817711



Dark Bay SKU# 29121817611