



CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Black & Tan Reclaimed Oak

Collection: Reclaimed

Species: Domestic Oak

Texture: Smooth Planed

Source: Agricultural Deconstruction

Color: Tones may range from tan to pink.

Unlimited color variation is inherent to the product.

Finish: Unfinished

Hardness: 1290

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING


Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3 3/4"	Back-Relief:	Included
Length:	12"– 6.5' random		

Black & Tan

This reclaimed mix of Domestic Oak features hints of its original non-toxic black paint from its previous life as horse farm fencing deep in the grain and fissures of the smooth planed surface. An exciting blend of warm tones with varying lights and darks, you'll find occasional knots and a modest price point on these single width reclaimed planks.

Solid (Unfinished)

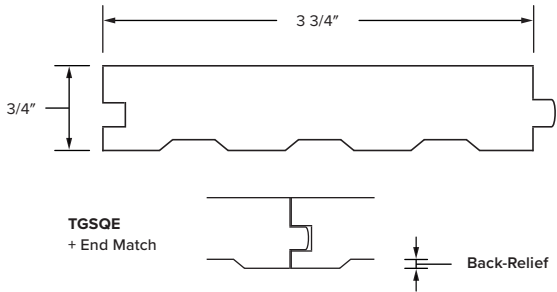

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: Nail holes and open knots can be present and may reach 1/2" in diameter. Larger voids may be included in longer planks.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Recycled 100% (SCS-COC-003998-D)

MRc3: Materials Reuse

(materials used for this credit cannot be applied to MRc4 or MRc5)

MRc4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRc3 or MRc7)

MRc5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13121810010