



**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks

1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Character Select Heart Pine

Collection: Reclaimed

Species: Domestic Heart Pine

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed **Grade:** Character Select

Source: Industrial deconstruction

Color: Tones may range widely from yellow to amber.

Unlimited color variation is inherent to the product.

Finish: Available in Naked and Pure

Hardness: 1200

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: 70% or greater heartwood content

Grain: No restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present. Knots typically should not exceed 2" in diameter.

Texture: Surface is fully planed and clear of saw marks and patina.

Voids: In engineered prefinished product voids up to 1" in diameter will be filled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: SCS-COC-003998-D

Engineered

FSC® Mix

Solid

FSC® Recycled 100%

MRC3: Materials Reuse

(materials used for this credit cannot be applied to MRC4 or MRC5)

MRC4: Recycled Content, 100% Post-Consumer Recycled Content

(materials used for this credit cannot be applied to MRC3 or MRC7)

MRC5: Regional Materials (call for details)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.


Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.


Character Select Heart Pine

Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hard and durable and gives Heart Pine its characteristic deep amber grain. Our Character Select grade offers lively grain variation, knots, nail holes, swirling colors—durability, character, and history in one.

Engineered (Prefinished)

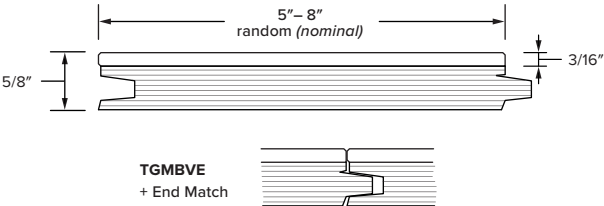

Solid (Unfinished)

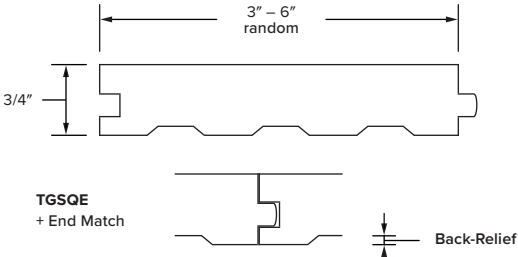

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGM BVE (Tongue and Groove Micro-Bevel Edge)
Width:	5" – 8" random (nominal)	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random wider widths may be available upon request	End Match:	Tongue and Groove
Length:	18" – 12' random	Back-Relief:	Included



Unfinished

SKU# 23172310010



Naked

SKU# 23172310111



Pure

SKU# 23172310211