

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 15 00 — Wood Decking

MANUFACTURER

Pioneer Millworks East
1180 Commercial Dr
Farmington, NY 14425

Pioneer Millworks West
2655 NE Orchard Ave
McMinnville, OR 97128

MATERIALS

Product: ACCOYA® Color—Grey Decking

Species: Radiata Pine

Texture: Smooth Planed

Source: Sustainably Harvested Forests

Color: Grey

Some color variation is inherent to the product.

Grade: Select

Finish: Acetylated & Color treated

Hardness: 922


*(Janka Ball Test ASTM D143, Natural wood products
have no minimum hardness since hardness is a
characteristic of species and cannot be controlled)*

DIMENSIONS

Solid (Prefinished)

Thickness:	1"	Profile:	S4SE4E (Square 4 Side Eased 4 Edges)
Width:	5 3/4"		
Length:	8'–15' random		

Solid (Prefinished)

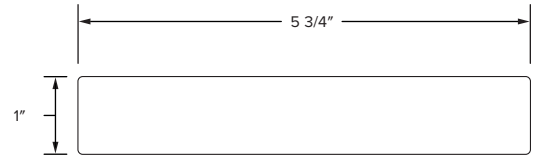

S4SE4E
(Square 4 Side
Eased 4 Edges)



ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: Boards to be primarily free of knots.

Voids: No voids present

Discoloration: Some variations in overall color tone
may be observed between batches, or single boards
within a batch, due to the natural variability of wood.

Checks: No checks present

Moisture Content: 3-5% in normal conditions

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC® Mix 70% (SCS-COC-003998-D)

MRc1: Building Life-cycle Impact Reduction

MRc3: FSC® Mix 70%

MRc4: Material Ingredients Optimization: C2C Gold Certified

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme
climate conditions including heat, cold,
humid or arid can cause movement and
performance issues with the material.

FASTENERS AND FIXINGS

- Avoid ferrous metals (coated mild steel)
- Face or hidden fasteners can be used and many fastening systems will work with Accoya Color
- Use stainless steel grades A2, A4 (304 / 316)
- To prevent end splitting, you will need to ensure that the fixing is placed with at least 1" clearance to the end of the decking board with a pre-drilled pilot hole through the boards
- To prevent staining using a non-corrosive barrier between treated lumber and metal hangers is recommended such as Protecto Wrap.