


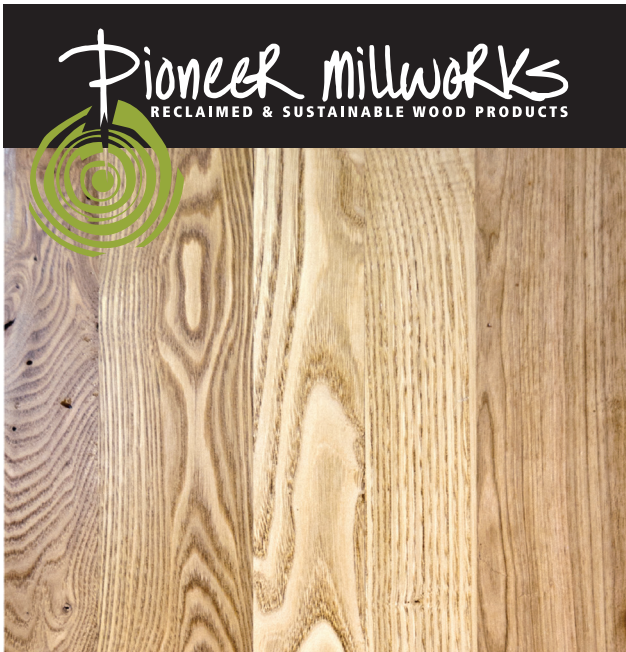

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
09 64 30 — Engineered Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Gothic Chestnut
Collection: Reclaimed
Species: Reclaimed Chestnut
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood
Texture: Smooth Planed
Source: Agricultural Deconstruction
Color: Tones may range from gold to brown.

Unlimited color variation is inherent to the product.

Finish: Available in Naked and Pure

Hardness: 540

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: Surface should generally be 95% clear of saw marks or patina.

Voids: In prefinished product, voids up to 1" in diameter will be filled with a black composite.

Insect marks, including pinholes, may also be present on the surface.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: GFA-COC-008489

Engineered

Solid

FSC Mix Credit

FSC Recycled 100%

MRc4: Building Product Selection and Procurement
(FSC Mix Credit / FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%.**

Environmental conditions consistently outside of these parameters could result in product performance issues.

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness: 5/8"

Width: 4" – 6" random
wider widths may be available upon request

Length: 18" – 12' random

Profile + End Match: **TGMBVE**
(Tongue and Groove Micro-Bevel Edge)

Wear Layer: 3/16"

Core: 1/2"

Solid (Unfinished)

Thickness: 5/8"


Width: 3" – 5" random
wider widths may be available upon request

Length: 18" – 12' random


Profile + End Match: **TGSQE**
(Tongue and Groove Square Edge)

Back-Relief: Included

Engineered (Prefinished)

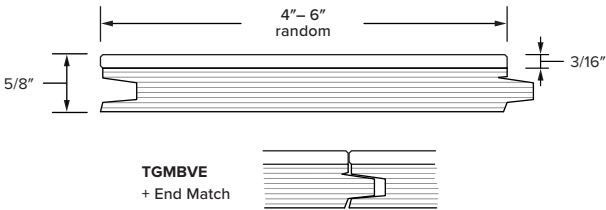

Solid (Unfinished)

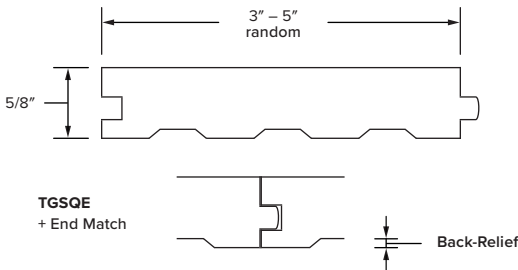



Unfinished

SKU# 13111310010



Naked

SKU# 13111310111



Pure

SKU# 13111310211