



**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Pemium Select Mixed Grain Heart Pine

Collection: Reclaimed

Species: Reclaimed Southern Yellow Heart Pine

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed

Source: Agricultural Deconstruction

Color: Tones may range widely from yellow to amber.

Unlimited color variation is inherent to the product.

Grade: Premium Select Mixed Grain

Finish: Available in Naked and Pure

Hardness: 1200

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

ADDITIONAL INFORMATION

Heartwood: 85% or greater heartwood content

Grain: 90% or greater dense grain
(8 rings or more per inch)

Knots: Overall appearance should be 90% clear of knots.

*An average of one knot per 6 LF is permissible.
Knots should not exceed 3/4" in diameter.*

Texture: Surface should be 100% clear of saw marks or patina.

Voids: Occasional nail holes up to 3/16"
in diameter may be present.

Discoloration: Ferrous staining from previous
fasteners may be present.

Checks: No checking permitted.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: GFA-COC-008489

Engineered	Solid
FSC Mix Credit	FSC Recycled 100%

GREENGUARD Gold Certified

MRC3: Low-Emitting Materials (GREENGUARD Gold)

MRC4: Building Product Selection and Procurement
(FSC Mix Credit / FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
for on-site grading, trimming and installation factors.


Climate: As with any wood flooring product,
the room temperature should be held
at a consistent range between **60-80° F**
with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these
parameters could result in product performance issues.*


Premium Select Mixed Grain Heart Pine

Coming straight from the heart of Longleaf Southern Yellow Pine timbers used in industrial construction, this reclaimed wood is a classic. Its high resin content means it's hardand durable and gives Heart Pine its characteristic deep amber grain. The Premium Select Mixed Grain is sorted for dense grain and limited knots and nail holes, while leaving a variety of grain patterns. It's a little more playful than its vertical grain cousin—lending a casual elegance.

Engineered (Prefinished)

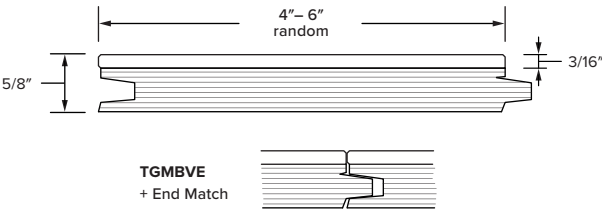

Solid (Unfinished)

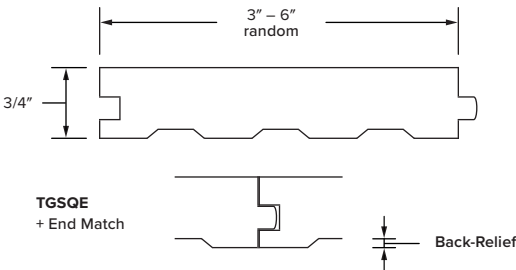

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random <i>wider widths may be available upon request</i>	Back-Relief:	Included
Length:	18" – 12' random		



Unfinished

SKU# 23252310010



Naked

SKU# 23252310111



Pure

SKU# 23252310211