



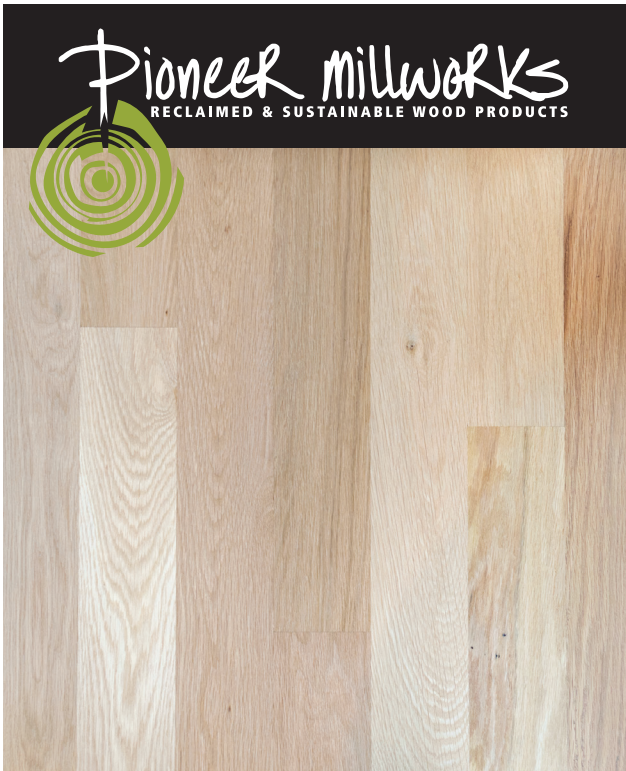

Clean White Oak

Sophisticated, warm, and chic this line offers a twist on classically elegant species, matching function with contemporary farmhouse style. Showcasing modern flare with a more uniform appearance than its reclaimed counterpart, this high grade of White Oak is sourced from forests which are carefully managed to strict Forest Stewardship Council® (FSC®) requirements. Celebrated in natural, fresh-sawn tones, expect consistent hues ranging from cream to tan, relaxed grain patterns, and as a few small knots. This sustainably harvested wood pairs especially well with our custom eco-friendly finishes for flooring and paneling.

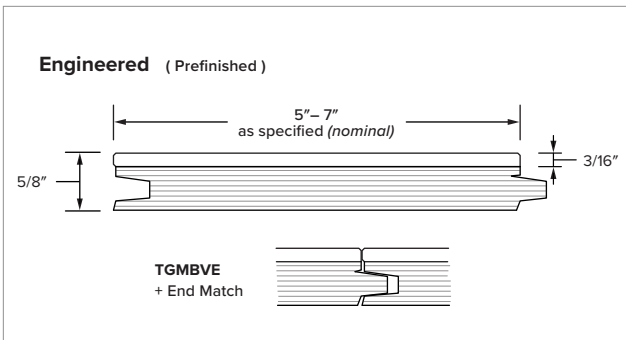

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 29 — Wood strip and plank flooring

09 64 30 — Engineered Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Clean White Oak

Collection: Modern Farmhouse

Species: Domestic White Oak

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed Grade: Clean

Source: Sustainably Harvested Forests

Color: Tones may range from cream to tan.

Unlimited color variation is inherent to the product.

Finish: Available in Naked, Pure, 5% White, Castle Brown, and Espresso

Hardness: 1360

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width	5" – 7" as specified (nominal)	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid

Available Upon Request

ADDITIONAL INFORMATION

Heartwood: 75% or greater Heartwood

Grain: Clear

Knots: Primarily free of knots.

Existing knots generally do not exceed 1/2" diameter.

Voids: No voids are permitted.

Discoloration: Limited mineral staining is permitted.

Checks: Only minor surface checking is permitted.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Mix Credit (GFA-COC-008489)

GREENGUARD Gold Certified

MRc3: Low-Emitting Materials (GREENGUARD Gold)

MRc4: Building Product Selection and Procurement (FSC Mix Credit)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 22182110010



Naked

SKU# 22182110111



Pure

SKU# 22182110211



5% White

SKU# 22182111011



Espresso

SKU# 22182111111



Castle Brown

SKU# 22182111211