


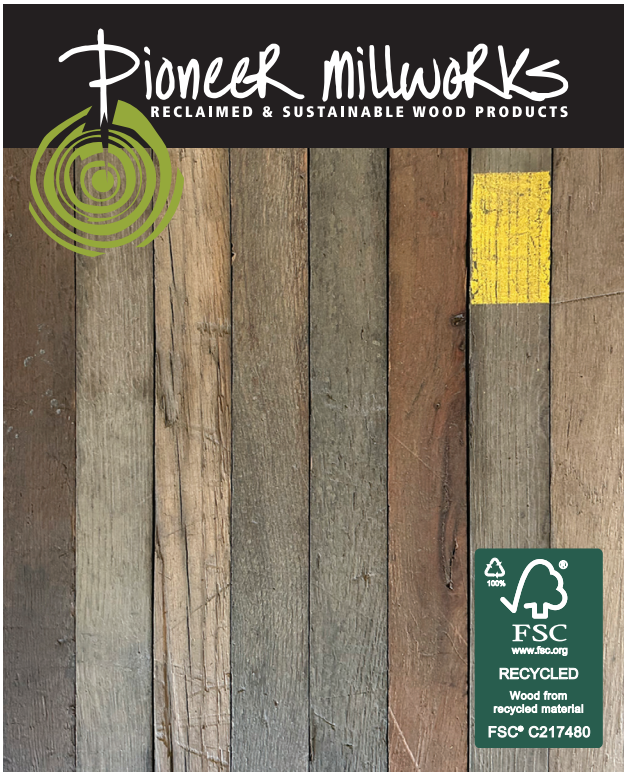

Foundry Oak

Salvaged from a historic furniture warehouse in High Point, North Carolina, this hardy oak floor was underfoot for a century of manufacturing. Material within this batch varies in color from golden brown to charcoal grey and may include occasional paint, old machine oil stains, and a range of wear marks. A great choice for commercial applications, this floor's unique appearance adds an instant and authentic industrial character to any environment.

Source Location: High Point, NC

Dating back to the 1920's, this historic building was most recently occupied by the Haworth Seating Plant. Until its closure in 2021 the facility still had a working steam whistle and a boiler that heated the building with wood scraps. Following World War 2 it was estimated that 60% of all furniture that was made in America was manufactured within a 150 mile radius of High Point.

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: Foundry Oak

Collection: Reclaimed

Species: Reclaimed Oak

Texture: Original surface patina with a light wire-brushing

Source: Industrial Deconstruction

Color: Tones may range from golden brown to charcoal grey.

May include occasional paint, old machine oil stains, and a range of wear marks.

Grade: Foundry Oak

Finish: Unfinished

Available prefinished upon request

Hardness: 1260

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Solid (Unfinished)

Thickness:	3/4" – 1" varies per batch	Profile:	AS-FOUND Tongue and Groove
Width:	3" nominal		
Length:	12" – 10' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Voids: Nail, bolt and other mechanical holes can be present and occasionally reach 3/8" in diameter.

Surface defects from insect marks, including pin holes may be present. Peg or bolt holes are often left open in longer planks.

Discoloration: No Limitation

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Recycled 100% (GFA-COC-008489)

MRC4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring or paneling product, the room temperature should be held at a consistent range between **60-80° F** with relative humidity between **30-60%**.

Environmental conditions consistently outside of these parameters could result in product performance issues.