


# Shou Sugi Ban Fir, Brushed

Traditionally Inspired, American Made™—an 18th century technique for preserving wood with fire is updated to meet 21st century design and performance standards. Aggressively burning the surface layer of our FSC® Certified Vertical Grain Douglas fir, we then wire-brush each plank multipletimes to remove the soft char and expose the contrasting grain below. This heavily textured and visually dynamic surface is coated with an exterior grade finish in a selection of cool greys, warm browns, or a pop of color.Our Fir is a durable wood well-suited for exterior applications. Boards include vertical contrasting grains and texture—designed to be a hardy siding option that can withstand weather. Our Shou Sugi Ban Fir Brushed exposes the bright hypnotizing mixture of colors and texture created by the charring process.

Our Shou Sugi Ban Fir Tiger's Eye is recommended for interior applications only due color instability resulting from the lack of pigment in the finish.

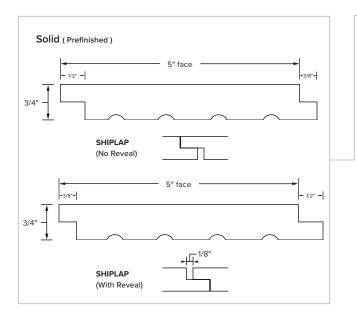

# CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

**06 42 00** — Wood Paneling

07 46 23 — Wood Siding

#### **MANUFACTURER**

Pioneer Millworks

2655 NE Orchard Ave McMinnville, OR 97128

#### **MATERIALS**

Product: Shou Sugi Ban Fir, Brushed

Collection: Shou Sugi Ban

**Species:** Douglas Fir **Texture:** Wire Brushed

Source: Sustainably Harvested Forests.

**Color:** Available in 9 standard colors. Latewood growth rings will range from dark brown to black.

Grade: D Select Vertical Grain.

Finish: Burned, brushed, and coated with an exterior sealer.

Back burned to promote stability. \* shown in Carbon

Hardness: 620

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

### **DIMENSIONS & MILLING**

Solid (Prefinished)

Length:

Thickness: 3/4" SHIPLAP (No Reveal)

SHIPLAP (With Reveal)

SHIPLAP (With Reveal)

Width: 5" face SQUARE-EDGE (S4S)

6'-16' random (Tongue and Groove Called lengths available

TGRVF

Bevel Edge)

(At least 20% of each order will be the longest length in the range)

#### ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: Vertical

Knots: Material to be primarily free of knots.

**Voids:** Occasional blown out knots up to 1" diameter may be present.

**Checks:** Checks allowed so long as material integrity is not adversely affected.

Moisture Content: Kiln dried 12–15% prior to milling.

## **CERTIFICATIONS & LEED INFORMATION**

FSC® Claim: FSC Mix Credit (GFA-COC-008489)

MRc4: Building Product Selection and Procurement

(FSC Mix Credit)

# INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood product, extreme climate conditions including heat, cold, humid or arid can cause movement and performance issues with the material.

