



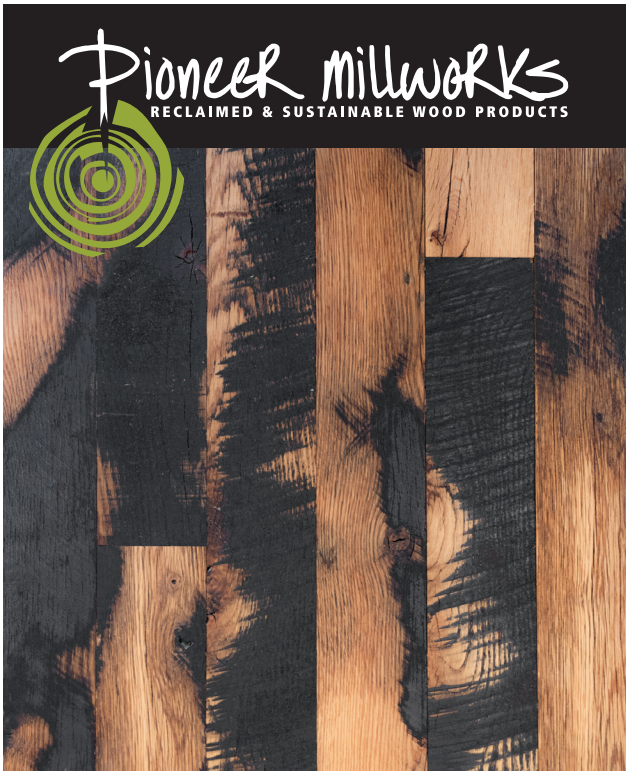


50/50

We take the black painted random mix of Red and White Oak boards salvaged from Kentucky horse farms and skip-plane the surface so that approximately 50% of the original paint remains. This makes for a stunning and durable reclaimed floor or wall with rock and roll character and a great story to tell.

Solid (Unfinished)

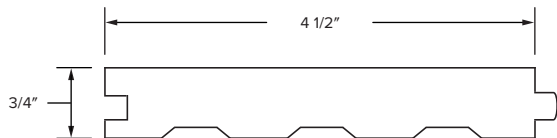

TGSQE
Non-End Match



CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring

06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: 50/50

Collection: Reclaimed

Species: Reclaimed Oak

Texture: Skip-Planed / Original Patina

Source: Agricultural Deconstruction

Color: Tones may range from tan to black.

Unlimited color variation is inherent to the product.

Finish: Unfinished unless specified otherwise.

Hardness: 1290 - 1360

(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Solid (Unfinished)

Thickness:	3/4"	Profile:	TGSQE (Tongue and Groove Square Edge)
Width:	4 1/2"	Back-Relief:	Included
Length:	12"– 6.5' random		

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.

Material is surfaced so that approximately 50% of the original black paint remains. Generally, 70% of boards have some paint remnants. Overwood of up to 1/8" can be expected.

Voids: Fastener holes and open knots can be present and may reach 1/2" in diameter in flooring or 1" diameter in paneling.

Larger voids are occasionally included to preserve long lengths. Surface defects from insect marks, including pin holes may be present.

Discoloration: Ferrous staining from previous fasteners may be present.

Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Recycled 100% (GFA-COC-008489)

MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.

Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.

Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13131810010



Pure

SKU# 13131810210