




50/50

We take the black painted random mix of Red and White Oak boards salvaged from Kentucky horse farms and skip-plane the surface so that approximately 50% of the original paint remains. This makes for a stunning and durable reclaimed floor or wall with rock and roll character and a great story to tell.

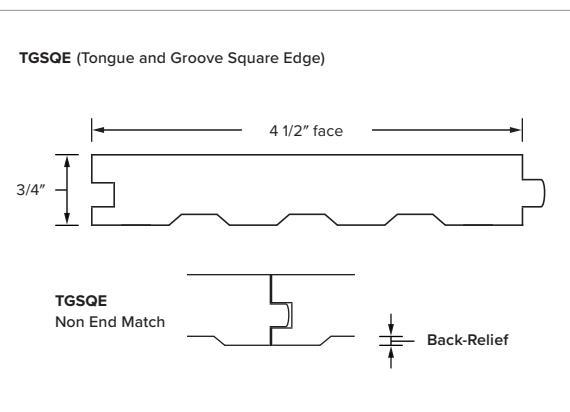

CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring
06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks
1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: 50/50
Collection: Reclaimed
Species: Reclaimed Oak
Texture: Skip-Planed / Original Patina
Source: Agricultural Deconstruction
Color: Tones may range from tan to black.
Unlimited color variation is inherent to the product.
Finish: Unfinished unless specified otherwise.

Hardness: 1290 - 1360

(Janka Ball Test ASTM D143, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)

DIMENSIONS & MILLING

Profile + End Match: **TGSQE** (Tongue and Groove Square Edge)
Back-Relief: Included
Thickness: 3/4"
Width: 4 1/2" face
Length: 12" - 6.5' random
(At least 20% of each order will be the longest length in the range)
Called lengths available

ADDITIONAL INFORMATION

Heartwood: No Restriction
Grain: No Restriction
Knots: No limitations on sound knots.
Surface defects from chipped or open knots may be present.
Texture: This mixture shows a varied pattern of saw marks, wear patterns, colors and textures.
Material is surfaced so that approximately 50% of the original black paint remains. Generally, 70% of boards have some
Voids: Nail holes and open knots can be present and may reach 1/2" in diameter. Larger voids may be included in longer planks.
Discoloration: Ferrous staining from previous fasteners may be present.
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.
Moisture Content: Kiln dried 6-9% prior to milling.

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: FSC Recycled 100% (GFA-COC-008489)
MRc4: Building Product Selection and Procurement
(FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material
For on-site grading, trimming and installation factors.
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.
Environmental conditions consistently outside of these parameters could result in product performance issues.



Unfinished

SKU# 13131810010



Pure

SKU# 13131810210