


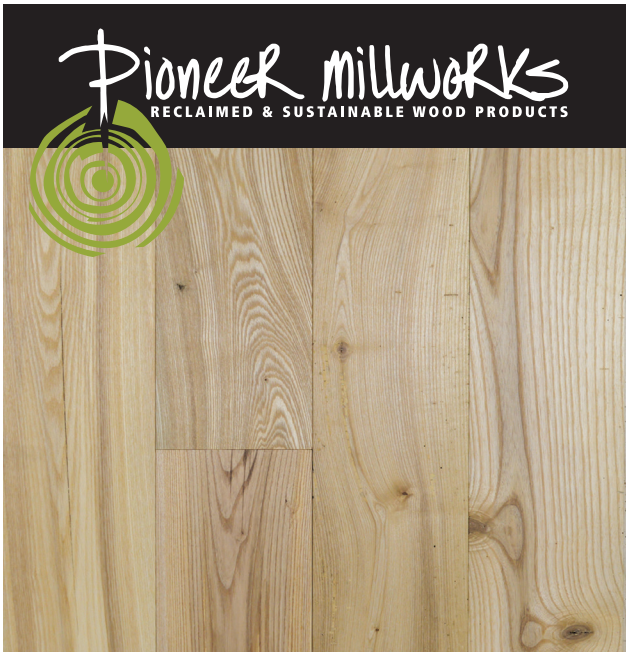

**CUT AND PASTE SPECIFICATION
INTO APPROPRIATE CSI DIVISION**

09 64 20 — Reclaimed Wood Flooring

09 64 30 — Engineered Wood Flooring

c06 42 00 — Wood Paneling

MANUFACTURER

Pioneer Millworks

1180 Commercial Dr
Farmington, NY 14425

MATERIALS

Product: American Gothic Ash

Collection: Reclaimed

Species: Reclaimed Ash

Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood

Texture: Smooth Planed

Source: Agricultural Deconstruction

Color: Tones may range from cream to brown.

Unlimited color variation is inherent to the product.

Finish: Available in Naked, Pure, 5% White,
Castle Brown, and Espresso

Hardness: 850

*(Janka Ball Test ASTM D1037-96A, Natural wood products
have no minimum hardness since hardness is a
characteristic of species and cannot be controlled)*

DIMENSIONS & MILLING

Engineered (Prefinished)

Thickness:	5/8"	Profile + End Match:	TGMBVE (Tongue and Groove Micro-Bevel Edge)
Width:	4" – 6" random <i>wider widths may be available upon request</i>	Wear Layer:	3/16"
Length:	18" – 12' random	Core:	1/2"

Solid (Unfinished)

Thickness:	3/4"	Profile + End Match:	TGSQE (Tongue and Groove Square Edge)
Width:	3" – 6" random <i>wider widths may be available upon request</i>	End Match:	Tongue and Groove
Length:	18" – 12' random	Back-Relief:	Included

ADDITIONAL INFORMATION

Heartwood: No Restriction

Grain: No Restriction

Knots: No limitations on sound knots.

Surface defects from chipped or open knots may be present.

Texture: Surface should generally be
95% clear of saw marks or patina.

Voids: In engineered prefinished product
voids up to 1" in diameter will be
filled with a black composite.

*Insect marks, including pinholes,
may also be present on the surface.*

Discoloration: Ferrous staining from previous
fasteners may be present.

Checks: Structural checks not affecting the integrity of
the plank, once installed, are allowed and more
prevalent as the width of the material increases.

Moisture Content: Kiln dried 6–9% prior to milling

CERTIFICATIONS & LEED INFORMATION

FSC® Claim: GFA-COC-008489

Engineered	Solid
FSC Mix Credit	FSC Recycled 100%
GREENGUARD Gold Certified	

MRc3: Low-Emitting Materials (GREENGUARD Gold)

MRc4: Building Product Selection and Procurement
(FSC Mix Credit / FSC Recycled 100%)

INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material

for on-site grading, trimming and installation factors.


Climate: As with any wood flooring product,
the room temperature should be held
at a consistent range between **60-80° F**
with relative humidity between **30-60%**.

*Environmental conditions consistently outside of these
parameters could result in product performance issues.*


American Gothic Ash

Reclaimed Ash is beloved for its neutral color tone and distinctive grain.
Occasional knots, nail holes, and insect marks give this floor
unmistakeable authenticity.

Engineered (Prefinished)

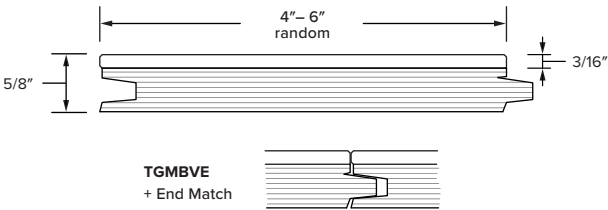

Solid (Unfinished)

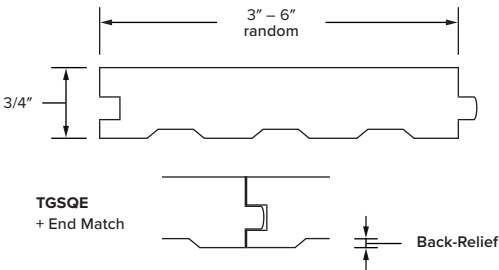



Unfinished

SKU# 23111210010



Naked

SKU# 23111210111



Pure

SKU# 23111210211




5% White

SKU# 23111211011



Espresso

SKU# 23111211111

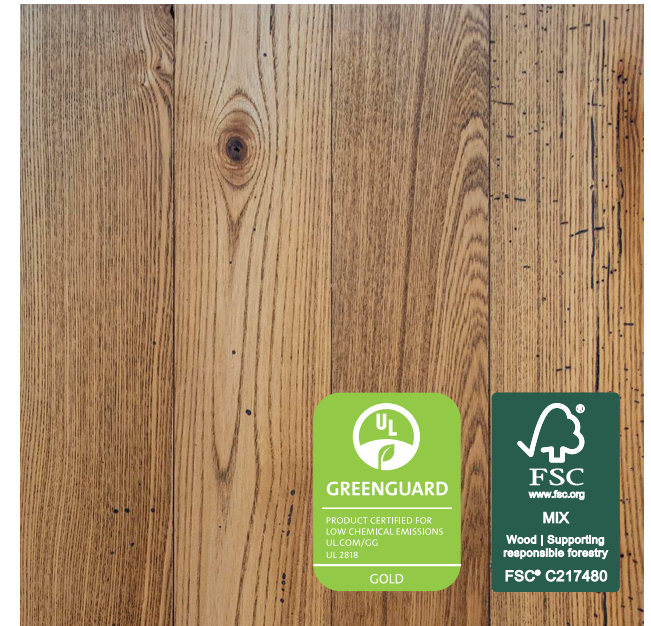

Castle Brown

SKU# 23111211211