





## American Gothic Chestnut

Nearly driven to extinction by a fungal blight in the early 20th century, Chestnut is one of the few woods that are only available as reclaimed lumber. Our Chestnut is sourced from barns and reveals glowing golds and rich browns when fully milled.

**TGMBVE** (Tongue and Groove Micro-Bevel Edge)

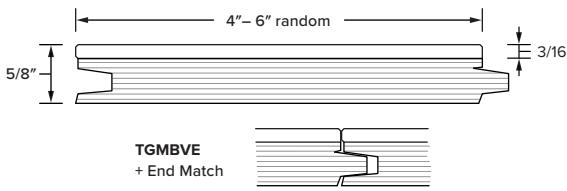

**TGSQE** (Tongue and Groove Square Edge)

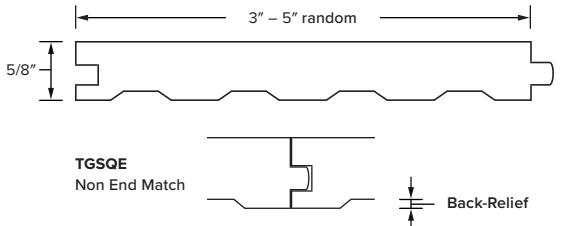

### CUT AND PASTE SPECIFICATION INTO APPROPRIATE CSI DIVISION

09 64 20 — Reclaimed Wood Flooring  
09 64 30 — Engineered Wood Flooring  
06 42 00 — Wood Paneling

### MANUFACTURER

Pioneer Millworks 1180 Commercial Dr Farmington, NY 14425

### MATERIALS

Product: American Gothic Chestnut  
Collection: Reclaimed  
Species: Reclaimed Chestnut  
Core: 9-Ply FSC® Certified & TCSA Compliant Birch Plywood  
Texture: Smooth Planed  
Source: Agricultural Deconstruction  
Color: Tones may range from gold to brown.  
*Unlimited color variation is inherent to the product.*  
Finish: Available in Naked and Pure  
Hardness: 540  
*(Janka Ball Test ASTM D1037-96A, Natural wood products have no minimum hardness since hardness is a characteristic of species and cannot be controlled)*

### DIMENSIONS & MILLING

Profile + End Match:	<b>TGMBVE</b> (Tongue and Groove Micro-Bevel Edge)	<b>TGSQE</b> (Tongue and Groove Square Edge)
Type:	Engineered (Prefinished)	Solid (Unfinished)
Thickness:	5/8"	5/8"
Width:	4"- 6" random <i>wider widths may be available upon request</i>	3"- 5" random <i>wider widths may be available upon request</i>
Length:	18"- 12' random	18"- 12' random
Wear Layer:	3/16"	N/A
Core:	1/2"	N/A
Back Relief:	N/A	Included

### ADDITIONAL INFORMATION

Heartwood: No Restriction  
Grain: No Restriction  
Knots: No limitations on sound knots.  
*Surface defects from chipped or open knots may be present.*  
Texture: Surface should generally be 95% clear of saw marks or patina.  
Voids: In engineered prefinished product voids up to 1" in diameter will be filled with a black composite  
*Insect marks, including pinholes, may also be present on the surface.*  
Discoloration: Ferrous staining from previous fasteners may be present.  
Checks: Structural checks not affecting the integrity of the plank, once installed, are allowed and more prevalent as the width of the material increases.  
Moisture Content: Kiln dried 6-9% prior to milling.

### CERTIFICATIONS & LEED INFORMATION

FSC Claim: FSC Mix Credit (GFA-COC-008489)

**Engineered**  
FSC Mix Credit

**Solid**  
FSC Recycled 100%

MRc4: Building Product Selection and Procurement  
*(FSC Mix Credit / FSC Recycled 100%)*

### INSTALLATION RECOMMENDATIONS

Overage: Minimum 10% additional material  
*for on-site grading, trimming and installation factors.*  
Climate: As with any wood flooring product, the room temperature should be held at a consistent range between 60-80° F with relative humidity between 30-60%.  
*Environmental conditions consistently outside of these parameters could result in product performance issues.*



Unfinished

SKU# 13111310010



Naked

SKU# 13111310111



Pure

SKU# 13111310211